

500-1DN 500-2DN 500-3DN

Drawer Warmers







500-3DN

• Halo Heat ... a controlled, uniform heat source that gently surrounds foods for better appearance, taste, and longer holding life.

- · Product moisture is retained without adding water.
- Digital control senses temperature drops faster, providing quick heat recovery time.
- · Extra large pans for additional capacity.
- Can be built into cabinets or counters. Built-in trim kits are available.
- · Stackable design.



500-2DN

Alto-Shaam drawer warmer is constructed with a non-magnetic stainless steel exterior and removable stainless steel drawer rail supports. Each drawer includes one (1) full-size (GN 1/1) 12" x 20" x 6" (305mm x 508mm x 152mm) stainless steel pan. The warmer is controlled by an ON/OFF power switch; up and down arrow buttons with a temperature range of 60°F to 200°F (16°C to 93°C); heat indicator light; temperature display button, and digital display.

Model 500-1DN:	One drawer warmer	, narrow design
-----------------------	-------------------	-----------------

- ☐ **Model 500-2DN:** Two drawer warmer, narrow design
- ☐ **Model 500-3DN:** Three drawer warmer, narrow design



Factory Installed Options

- Electrical Choices
 - \square 120V
 - \square 208-240V
 - □ 230V
- Drawer Choices (order per drawer)
 - ☐ Non-Vented, Standard
 - ☐ Vented, Optional (5014561)

Additional Features

- · Stack units without additional hardware
- · Individual or stacked units can be mounted on:
 - □ 3" (76mm) Casters and Caster Stand Assembly
- □ 5" (127mm) Casters and Caster Stand Assembly
- ☐ 6" (152mm) Leg Stand Assembly





W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. Phone: 262.251.3800 800.558.8744 u.s.A./CANADA Fax: 262.251.7067 800.329.8744 u.s.A. only www.alto-shaam.com



500-1DN, 500-2DN, 500-3DN


Drawer Warmers



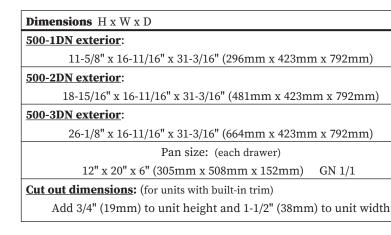

26-1/8" (664mm) 18-15/16" (481mm) 	900-3DN	500-2DN	500-1DN	16-11/16" (423mm)
26-1/8" (664mm) 18-15/16" (46	1	31mm)-	1-5/8"— 96mm)	
26-1/8" (664mm)	5/16" (48	11 (28	
	.6-1/8" (18-16		
	5			

Electrical						
V	Ph	Hz	A	kW		
120	1	50/60	5.3	0.64		NEMA 5-15P 15A, 125V plug
208-240	1	50/60	2.7	0.64	8	NEMA 6-15P 15A, 250V plug
230 © CEE 7/7	1	50/60 CH2-16P	2.6	0.59 BS 1	363	Plugs rated 250V AS/NZS 3112



Product Capacity

41 lbs (19 kg) maximum • each drawer (34 baked potatoes, 50 dinner rolls)

Weight (est.)				
	500-1DN	500-2DN	500-3DN	
Net:	67 lb (30 kg)	100 lb (45 kg)	130 lb (59 kg)	
Ship:	75 lb (34 kg)	112 lb (51 kg)	145 lb (66 kg)	
Carton dimensions: (L X W X H)				
33" x 21" x 15" 33" x 21" x 22" 33" x 21" x 29"				
(838n	nm x 533mm x 381mm)	(838mm x 533mm x 559mm)	(838mm x 533mm x 737mm)	

Installation Requirements

Drawer warmer must be installed level, and must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Clearance Requirement (for ventilation)

Minimum: 3" (76mm) at the back, 2" (51mm) at the top, and 1" (25mm) at both sides. On-site venting for proper airflow must also be provided for built-in counter installations.

Accessories	
Built-in Trim Kit	Caster Stand Assembly
□ 500-1DN 5015148	\square with 5" (127mm) casters 55534
□ 300-1DIN 30131+6	□ with 3" (76mm) casters 5010921
□ 500-2DN 5015150	☐ Leg Stand Assembly 55535
□ 500-3DN 5015154	☐ Perforated Pan Grid, 12" x 20" (305mm x 508mm) 16642



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. Phone: 262.251.3800 800.558.8744 U.S.A./Canada Fax: 262.251.7067 800.329.8744 U.S.A. only www.alto-shaam.com