



AGB & AFB SERIES:- BENCH REFRIGERATOR & FREEZERS



700mm models shown. Shown with optional legs.

MAIN DATA

FEATURES:

- Temperature range Fridge: +1° to +10° C @ 38°C ambient Freezer: -18° to -22° C @ 38°C ambient
- Refrigerator available in 600mm and 700mm depth.
- Stainless steel series 340 exterior doors, fronts & Sides.
- Stainless steel interior floor with coved corners.
- Stucco aluminium back panel.
- Recessed handles.
- Self closing hinged doors with 90° stay open feature.
- LED digital temperature display.
- PVC coated adjustable steel shelves.
- Automatic defrost. Duration can be changed to suit environment.
- Removable door gasket to allow cleaning.
- 60mm Energy-efficient polyurethane insulation.

Specifications are subject to change without notice. E&OE.

Model	Average Temp	Doors	Volume (Gross L)	Shelves	External Dimensions w x d x h (mm)	Voltage	Power Outlet	Cord Length	Shipping Weight
AGB30-6L2	+2°C	2	265	2	1400 x 600 x 880*	240v/50hz	10amp	2.4	103kg
AGB30-7L2	+2°C	2	318	2	1400 x 700 x 880*	240v/50hz	10amp	2.4	103kg
AFB30-7L2	-18°C	2	318	2	1400 x 700 x 880*	240v/50hz	10amp	2.4	123kg
AGB50-6L3	+2°C	3	412	3	1875 x 600 x 880*	240v/50hz	10amp	2.4	116kg
AGB50-7L3	+2°C	3	495	3	1875 x 700 x 880*	240v/50hz	10amp	2.4	116kg
AFB50-7L3	-18°C	3	495	3	1875 x 700 x 880*	240v/50hz	10amp	2.4	136Kg

* Overall height on standard castor 880mm. Option leg or low profile Caster over all height 850mm

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572

Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com





AGB & AFB SERIES:- BENCH REFRIGERATOR & FREEZERS

Specification

- Refrigeration System: Fully balanced self contained condensing unit with forced draught evaporator.
- Condensing unit: Right hand side. Unit access from front thru hinged cover. Ventilation on all three sides for cooler running
- Refrigerant: Environmentally friendly Refrigerator - R134A.
 - Freezer - R404A
- **Defrost:**

Fridge:- Cyclic defrost. Supplemented with timed defrosts via electronic controller. Freezer:- Electric Defrost. No of defrost variable to suit usage


- Condensate Disposal: No-cost, hot gas condensate disposal. No need for a tundish (drain).
- Electronic Controller: Italian designed, Carel temperature controller and digital display.
- Shelves: 1 height adjustable, PVC • coated, shelf per door. Fitted on stainless steel tray slides.

- **Operation conditions:** • Fridge: 0° to 10° @38°C ambient. Freezer : -18° to -22° @38°C ambient.
- Electrical: Units come ready for connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.
- Construction: Stainless Steel • doors, front and sides provide a clean and dent resistant cabinet. Clear anodized aluminum back.
- Inner: Stainless Steel inner with inner tray designs with coved corners for easy cleaning.
- **Insulation:** 50mm high density polyurethane foamed in place, Blowing agent, cyclopentane for CFC free Ozone protection and superior insulating properties. .
- Door: Solid Stainless Steel door. Hinging: Self closing with a dwell open position for easy loading and unloading.
- Gasket: PVC welded one piece magnetic gasket. Removable without the need for tools.

- Castors: 4 (2 x locking) swivel • heavy duty castors.
- Warranty1: Austwide's Manufacturers warranty 12 month parts and labour. See terms and conditions of sale for full description.

Options

- Additional shelves.
- Additional tray slides.
- Legs replacing castors.
- Low profile castors. Overall height 850mm

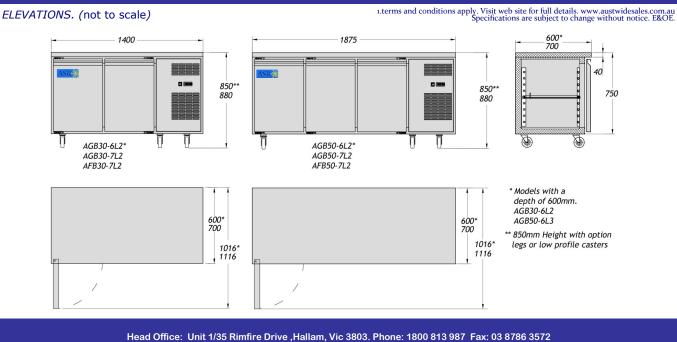

Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com