

# specifications

# Refrigeration

# RF7.UBR.2.SD

ReFlex Series, 2 Door (Solid), Underbench Fridge



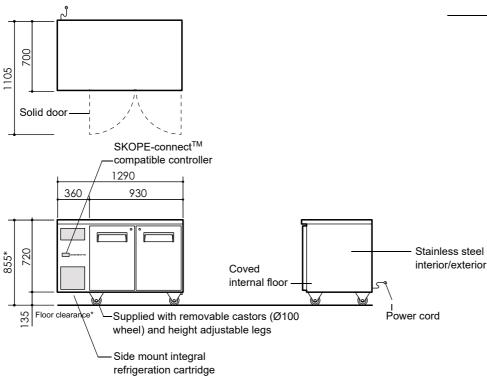

## **CABINET**

 Model ID
 RF7.UBR.2.SD

 SKOPE ID
 RF7UBR2-SCLH-SD

Doors 2 × self-closing, lockable, solid swing doors. LH, RH Internal door opening 2 × door openings: 560mm high × 355mm wide

Shelves 4 × adjustable height shelves: 395mm wide × 510mm deep

Worktop Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating

cyclopentane foamed core)

cycloperitarie loanied core)

Material 304 AISI stainless steel interior and exterior

#### **PERFORMANCE**

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable with SKOPE-connect -2°C to 10°C)

# **ELECTRICAL**

Climate class 5 (40°C/40% RH)

Interior lighting

Power cord

Power supply

Current draw

1 × 400mm, 4W LED light (door activated)

Supplied with 2.6m, 10 Amp plug and lead

220-240 Volts a.c. 50 Hz, single phase supply

2.0 Amps (includes unit 1.5 Amps)

### REFRIGERATION

Controller | SCS Connect (SKOPE-connect<sup>TM</sup> compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Side mounted, integral, removable refrigeration cartridge (part number

**ULKCNI-0021)** 

Refrigerant R290 / 80g (natural refrigerant)

Nominal capacity
Heat rejection (Avg/peak)
Drainage

450 Watts
75 Watts/80 Watts
No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

## SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DI	ME	NIC		VIC.
	IVIL	<b>V</b>	v	V-2

	External	Internal
Height	855mm*	570mm
Width	1290mm	820mm
Depth	700mm	530mm
Floor area	0.9m <sup>2</sup>	ı
Weight	106kg	
Internal volume	248 litres	

<sup>\*</sup> With supplied castors fitted. See height variation below

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	720mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions Overall cabinet dimensions		imensions		
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements	
Тор	Not required
Sides	Not required
Back	Not required
Bottom	Not required

PSS0585 Rev. 1.4 Aug. 2019



