



Refrigerated Display and Back Bar counters



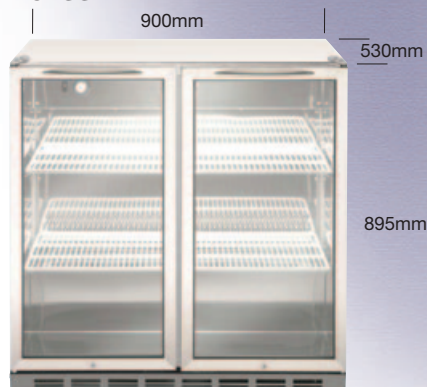
Bottle Cooler

Benefits

- A choice of one or two door designs
- Flexible operating temperatures from 2°/10°C
- Self contained cabinets to save on installation costs and small bar requirements
- Double glazed doors
- Fully adjustable shelves to suit vertical stacking of most bottle sizes
- 100% CFC free polyurethane foam for greater insulation and added strength
- Hard wearing stainless steel exterior with easy to clean stainless steel interior
- Small adjustable levelling feet ensures counter stability in any environment



BC1SS

BC2SS


Door opening depth 1130mm

Model	Doors	Temp°C	Amps	Shelves
600mm x 530mm x 895mm high BC1SS	1	+2/+10	1.75	2
900mm x 530mm x 895mm high BC2SS	2	+2/+10	2.0	2

*Installation of all counters and cabinets requires adequate ventilation
We reserve the right to change the specification without notice*

Refrigeration

- Forced air refrigeration system with auto defrost and evaporation
- Single phase, 240V fan motor complete with fitted moulded plug
- 32°C ambient operating temperature
- CFC free refrigerant

Controls

- Easy to adjust analogue thermostat
- Interior light switch

Construction

- Designed and manufactured to international quality standards
- Stainless steel interior
- Stainless steel exterior
- 50mm thick CFC free insulation
- Adjustable front levelling feet
- Adjustable shelves
- Double glazed doors with 95° dwell





High Performance Refrigerated Display and Back Bar Counters

Cameo

Benefits

- A choice of two, three or four door designs
- Self contained or remote cabinets to suit all refrigeration requirements
- Double glazed self closing doors to maintain accurate temperatures
- Specifically designed to work in high ambient temperatures with rapid cool down
- Operating temperatures 1°C to 4°C
- 100% CFC free polyurethane foam for greater insulation and added strength
- Adjustable shelves to accommodate all sizes of bottles and cans
- Hard wearing stainless steel exterior with easy to clean stainless steel interior
- Full length vertical fluorescent lighting for enhanced product display
- Coved floor base for easy cleaning.



C6502U



Model	Doors	Temp°C	Amps	Shelves (per door)	Capacity
-------	-------	--------	------	--------------------	----------

Self Contained: 1420mm/1885mm/2350mm x 650mm x 930mm

C6502U	2	+1/+4	3.5	2	370
C6503U	3	+1/+4	3.5	2	575
C6504U	4	+1/+4	3.5	2	775

Remote: 1050mm/1575mm/2100mm x 650mm x 930mm

C6502R	2	+1/+4	-	2	370
C6503R	3	+1/+4	-	2	575
C6504R	4	+1/+4	-	2	775

Williams Refrigeration reserve the right to change specifications without notice.

C6503R



Controls

- Digital temperature controller (self contained only)
- Easy to read dial thermometer (remote cabinets)
- On/off switch for interior light only.

Construction

- Stainless steel interior and exterior with galvanised rear and under
- Two PC adjustable shelves per door
- Self closing double glazed doors with 90° dwell
- Designed to be mounted on a plinth
- Supplied on castors for mobility. Legs included for remote models.



Colorbond®
Durability

Refrigeration

Self Contained:

- Forced air refrigeration system
- 240 volt single phase power
- 43°C ambient operation
- Waste heat recovery vaporiser
- Left hand unit standard.

Remote:

- Forced air refrigeration system
- 240 volt single phase power
- Supplied with evaporator, thermostat, tx valve and condensate drain exit
- Services exit middle rear of cabinet.

Options

- Black or White Colorbond®
- Locks
- Legs or castors
- Double glazed Argon Low E glass doors
- Double glazed heated doors.





New
ST Model

Self Contained/Remote Under Counter Refrigerators

Boronia

Benefits

- A choice of two, three or four door designs
- Self contained or remote cabinets to suit all refrigeration requirements
- Double glazed Argon Low E self closing doors to maintain accurate temperatures
- Specifically designed to work in high ambient temperatures with rapid cool down
- Operating temperatures from 1°C to 4°C
- 100% CFC free polyurethane foam for greater insulation and added strength
- Hard wearing stainless steel exterior with easy to clean stainless steel interior
- Full length vertical fluorescent lighting for enhanced product display.



(Above) HBR3R
with optional
service
compartment
shown

HBR3U

HBR3R



HBR3UST



HBR2R



Model	Doors	Temp°C	Amps	Shelves (per door)	Capacity (ltrs)
-------	-------	--------	------	--------------------	-----------------

External dimensions: 1026mm/1539mm/2052mm x 650mm x 875mm high (on legs)

HBR2R	2	+1/+4	0.5	1	300
HBR3R	3	+1/+4	0.5	1	470
HBR4R	4	+1/+4	0.5	1	640

External dimensions: 1426mm/1939mm/2452mm x 650mm x 845mm high (on castors)

HBR2UST	2	+1/+4	2.7	1	300
HBR3UST	3	+1/+4	3.5	1	470
HBR4UST	4	+1/+4	4.0	1	640

* Optional service compartment for remote cabinet adds 250mm to length of cabinet.

* Refrigerant wattages are available on request.

Williams Refrigeration reserve the right to change specifications without notice.

Controls

- Easy to read dial thermometer
- On/off switch for interior light.

Construction

- Designed and manufactured to international quality standards
- Stainless steel interior and exterior except rear and under
- Self contained models have a stainless steel top
- Remote models have a galvanised top
- One adjustable PC shelf per door
- Self closing double glazed Argon Low E doors with 90° dwell
- Supplied on castors for mobility. Legs included for remote models.

Refrigeration

Self Contained:

- Forced air refrigeration system
- Off cycle defrost
- 43°C ambient operation
- Waste heat recovery vaporiser
- 240 volt single phase power
- Left hand unit standard.

Remote:

- Forced air refrigeration system
- Supplied with evaporator, thermostat, tx valve and condensate drain exit (add 100mm extra to width for pipes)
- 240 volt single phase power
- Left hand services standard.

Options

- Block locks or locking tabs
- Solid doors
- Double glazed heated doors
- Right hand unit/services
- Service compartment.



Williams Refrigeration Australia Pty Ltd

38-42 Gaine Road Dandenong South Victoria Australia 3175

Telephone: 03 8787 4747 Facsimile: 03 8787 4787 FreeCall: 1800 338 148

Email: sales@williamsref.com.au www.williamsref.com.au ABN 25 006 630 084



High Performance Glass Chillers



Glass Chiller

Benefits

- A choice of one or two door designs
- Remote or self contained cabinets to suit all bar refrigeration configurations
- Automatic basket lifting mechanism or fixed shelves
- Double glazed self closing doors to maintain temperatures
- Specifically designed for rapid cool down of glasses
- 100% CFC-free polyurethane foam for greater insulation and added strength
- Hard wearing stainless steel exterior with easy to clean stainless steel interior
- Drain through floor for wash out facility, requires drain or tundish.



Glass Chiller Specifications

GC1RSL



GC2R



GC1USL



GC2U



Model	Doors	Temp°C	Amps	Shelves	Capacity (glass baskets)
-------	-------	--------	------	---------	--------------------------

Remote: External Dimensions 766mm/1327mm x 600mm x 875mm high

GC1RSL	1	+1/+5	0.5	Spring	4
GC2RSL	2	+1/+5	0.5	Spring	8
GC1R	1	+1/+5	0.5	Adjustable	4
GC2R	2	+1/+5	0.5	Adjustable	8

Self Contained: External Dimensions 1166mm/1727mm x 600mm x 875mm high

GC1USL	1	+1/+5	3.0	Spring	4
GC2USL	2	+1/+5	3.8	Spring	8
GC1U	1	+1/+5	3.0	Adjustable	4
GC2U	2	+1/+5	3.8	Adjustable	8

Williams Refrigeration reserve the right to change specifications without notice.

Controls

- Digital microprocessor control with adjustable electronic thermostat and defrost interval to ensure excellent temperature control.

Construction

- Designed and manufactured to international quality standards
- Stainless steel interior and exterior except rear and under
- Left hand unit/services standard
- Requires drain for water discharge
- Suits 17" x 14" (431mm x 355mm) baskets (not supplied)
- Supplied on castors for mobility (reduces height by 30mm). Legs included for remote models.

Refrigeration

Self Contained :

- Forced air refrigeration system
- 240 volt single phase power

Remote:

- Forced air refrigeration system
- 240 volt single phase power
- Supplied with evaporator, tx valve and digital thermostat (add 100mm extra to width for pipes).

Options

- Plinth mounted
- Right hand unit/services
- Shelves.

