



## Compact Refrigeration Range



### Amber

#### Benefits

- Front vented refrigeration system for increased performance in undercounter positioning
- Time saving and cost effective automatic defrost and vaporisers on refrigerator model
- Low noise design with high efficiency evaporator fans (refrigerator only) for improved product and energy performance
- Stainless steel interior and exterior (except rear and under)
- 100% CFC free polyurethane foam for greater insulation and added strength
- Rated for 32°C ambient working conditions
- Adjustable digital thermostat for flexible cooling and accuracy
- Temperature ranges from -18°C to +4°C
- Lockable doors
- Easy to clean balloon gaskets
- Built for light to medium usage.



## Amber Specifications


### HA135SS

W 606mm



H 845mm  
or 800mm  
(Low Profile)

D 577mm

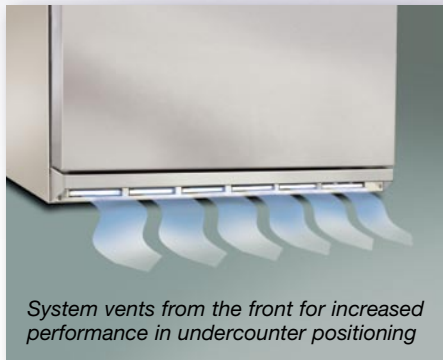

System vents from the front for increased performance in undercounter positioning

Model	Temp °C	Amps	Shelves	Net Capacity (Litres)
-------	---------	------	---------	-----------------------

#### Amber 135: External Dimensions 606 x 577 x 845

HA135SS	+1/+4	1.75	2	133
LA135SS	-18/-22	1.2	2	133

#### Amber 135 Low Profile: External Dimensions 606 x 577 x 800

HA135SS - LOWPROFILE	+1/+4	1.75	2	133
LA135SS - LOWPROFILE	-18/-22	1.2	2	133

Williams Refrigeration reserve the right to change specifications without notice.

### Controls

- Digital microprocessor control with adjustable electronic thermostat to ensure excellent temperature control.
- Automatic defrost interval on refrigerator model
- Controller ensures operation even if the control thermostat fails.

### Construction


- Designed and manufactured to international quality standards
- Stainless steel interior and exterior except rear and under
- Self closing doors
- Nylon coated shelves (adjustable in refrigerator model only)
- Lockable doors
- 50mm castors standard (front locking castors).

### Refrigeration

- Self contained cabinet
- Forced draught cooler in refrigerator model
- Commercial refrigeration system with fan cooled condensers on all models
- Manual defrost on freezer models
- 240 volt single phase power
- 32°C ambient operation.

### Options

- Adjustable front legs
- Left hand hinged door.



## Williams Refrigeration Australia Pty Ltd

38-42 Gaine Road Dandenong South Victoria Australia 3175

Telephone: 03 8787 4747 Facsimile: 03 8787 4787 FreeCall: 1800 338 148

Email: sales@williamsref.com.au www.williamsref.com.au ABN 25 006 630 084