



High Energy Efficient Upright Display Refrigerators and Display Freezers

Diamond Star

Benefits

- Reduce running costs
- Reduce greenhouse emissions
- High ambient operation 43°C
- Heavy duty applications
- Stunning, high intensity, long life LED lighting
- Large storage volume
- Maximum useable internal space
- Increased viewing window – maximises product presentation
- Accommodates 1/1 Gastronorm trays on shelves
- Proven **AirSmart** technology
- New **Integra** door hinge system
- Reliable performance backed by 24/24 warranty
- Easy product loading with 'hold open' dwell, self closing door system
- One piece door frame for long life integrity
- Ease of HACCP compliance with WUBC II temperature monitoring and large digital displays.



NEW!
High Energy Efficiency*
Display Refrigerators
& Display Freezers
Save \$ and greenhouse emissions

***MEPS** Classification (Australian Government, Dept of the Environment, Water, Heritage and the Arts)

Glass door Freezer: HIGH ENERGY EFFICIENCY

Glass door Refrigerator: HIGH ENERGY EFFICIENCY

HDS1SD



H 2032mm
on castors

D 710mm
W 737mm

LDS1GD



HDS2GD



H 2032mm
on castors

D 710mm
W 1466mm



LED lighting – standard on glass door models

Model	Temp°C	Amps	Shelves (per door)	Net Capacity (Litres)
1 Door: External dimensions 737mm x 710mm x 2032mm				
HDS1	+1/+4	3.5	4	516
LDS1	-18/-22	4	4	516
2 Door: External dimensions 1466mm x 710mm x 2032mm				
HDS2	+1/+4	4.5	4	1086
LDS2	-18/-22	6.5	4	1086

Williams Refrigeration reserve the right to change specifications without notice.

Features

- High intensity, long life, LED lighting – standard on glass door models
- High density, high efficiency, CFC free polyurethane injected foam insulation
- Williams WUBC II digital controller incorporating automatic peak temperature monitoring for ease of HACCP verification
- One and two door models
- Split shelves on two door models
- Triple glazed, heated glass door standard on all freezers

- Front locking castors
- Self closing doors with 100° dwell
- Adjustable shelves – PVC coated

Refrigeration

Self Contained:

- Forced air refrigeration system
- 240 Volt single phase power
- 43°C ambient operation
- Waste heat condensate tray

Remote:

- Forced air refrigeration system
- 240 volt single phase power
- Supplied with evaporator, tx valve and digital thermostat

Controls


- Digital microprocessor control with adjustable electronic thermostat and defrost interval to ensure excellent temperature control
- On/Off switch for interior light – glass door models
- Automatic door fan cut off control – all freezer models

Options

- Self contained or remote
- Stainless steel interior and exterior
- Solid or glass doors
- Double glazed heated doors – Triple glazed heated supplied standard on freezers
- Locks
- White or Black Colorbond®
- Custom colours
- Legs (add 38 mm) – must be specified at time of ordering.

Construction

- One piece, foamed in situ construction
- Colorbond® interior and exterior except rear and under
- Stainless steel interior floor



Colorbond® Durability



Bottom Mounted Upright Display Refrigerator



Quartz

Benefits

- One and two door models
- Undermount refrigeration unit for optimal product display
- Available in Colorbond® and stainless interior/exterior
- Adjustable digital thermometer for flexible cooling and accuracy
- Time saving and cost effective automatic defrost and vaporisers
- 100% CFC free polyurethane foam for greater insulation and added strength
- Operating temperatures from 1°C to 4°C
- Waste heat condensate tray
- Rated for 43° ambient working conditions
- Double glazed doors with one piece door frame
- Full length vertical fluorescent lighting for enhanced product display.

HQ14



H 2040mm on castors

D 710mm

W 650mm

HQ28



H 2040mm on castors

D 710mm

W 1000mm

Model	Temp°C	Amp	Shelves	Net Capacity (Litres)
<i>External dimensions 650mm x 710mm x 2040mm</i>				
HQ14	+1/+4	3.5	4	400
<i>External dimensions 1000mm x 710mm x 2040mm</i>				
HQ28	+1/+4	3.5	4	670

Williams Refrigeration reserve the right to change specifications without notice.

Controls

- Digital microprocessor control with adjustable electronic thermostat and defrost interval to ensure excellent temperature control
- On/off switch for interior light.

Refrigeration

- Self contained cabinet
- Forced air refrigeration system
- 240 volt single phase power
- 43°C ambient operating temperature
- Waste heat recovery vaporiser.

Construction

- Designed and manufactured to international quality standards
- Colorbond® interior and exterior except for rear and floor
- Stainless steel interior floor
- Self closing double glazed doors with 90° dwell
- Four PC adjustable shelves
- Front locking castors.

Options

- Stainless steel interior and exterior
- Legs (add 30mm to height)
- Locking tabs.



Colorbond® Durability





Non Gastronorm Upright Refrigerators and Freezers

Pearl

Benefits

- Available in two or three door models
- Self contained or remote cabinets to suit all refrigeration requirements
- Forced draught cooler in both freezer and refrigerator models
- Colorbond® interior/exterior with stainless steel floor
- Adjustable digital thermostat for flexible cooling and accuracy
- Time saving and cost effective automatic defrost and vaporisers
- 100% CFC free polyurethane foam for greater insulation and added strength
- Double glazed doors with one-piece door frame
- Removable refrigeration module for easy replacement
- Rated for 43°C ambient working conditions¹
- Waste heat condensate tray
- Temperature ranges from -18° to +10°C
- Full length vertical fluorescent lighting for enhanced product display on glass door model.



HP2GDCB



LP3SDCB



HP2GDSS

Stainless Steel option shown



Model	Temp°C	Amp	Shelves	Net Capacity (Litres)
2 Door: External dimensions 1225mm x 710mm x 2040mm				
HP2	+1/+4	4.5	4	980
LP2	-18/-22	6.5	4	980
3 Door: External dimensions 1825mm x 710mm x 2040mm				
HP3	+1/+4	5	4	1510
LP3	-18/-22	8.5	4	1510

Williams Refrigeration reserve the right to change specifications without notice.

Controls

- Digital microprocessor control with adjustable electronic thermostat and defrost interval to ensure excellent temperature control
- On/off switch for interior light (glass door standard).

Construction

- Designed and manufactured to international quality standards
- Colorbond® interior and exterior except rear and under
- Stainless steel interior floor
- Self closing double glazed doors with 90° dwell
- PC adjustable shelves
- Front locking castors.

Glass Door Freezers - 2 door model only:

- Fitted with internal ceiling mounted evaporator
- Uses external vaporizer tray at rear which adds 125mm to overall depth of cabinet
- Triple glazed heated doors standard.

Refrigeration

Self Contained:

- Forced air refrigeration system
- 240 volt single phase power
- 43°C ambient operation¹ (LP2GD and HP3GD - 32°C ambient)
- Waste heat condensate tray.

Remote:

- Forced air refrigeration system
- 240 volt single phase power
- Supplied with evaporator, tx valve and digital thermostat.

Options

- Stainless steel interior and exterior
- Solid doors (full or half)
- Legs (add 30mm to height)
- Pass through refrigerators (2 door only) Foodservice applications only
- Custom colours and illuminated sign housing
- Flower cabinet
- Locks
- Argon Low E glass
- Double glazed heated doors
- Undermount
- Light in solid door model.



Colorbond® Durability

Williams Refrigeration Australia Pty Ltd

38-42 Gaine Road Dandenong South Victoria Australia 3175

Telephone: 03 8787 4747 Facsimile: 03 8787 4787 FreeCall: 1800 338 148

Email: sales@williamsref.com.au www.williamsref.com.au ABN 25 006 630 084



Upright Display Refrigerators

EP2

Benefits


- Two door
- Removable refrigeration module for ease of servicing
- Colorbond interior/exterior
- Adjustable thermostat and digital thermometer for flexible cooling and accuracy
- Time saving and cost effective automatic defrost and vaporisers
- CFC-free polyurethane insulation
- Twin lights to interior.





EP2 Specifications


EP2GDCB

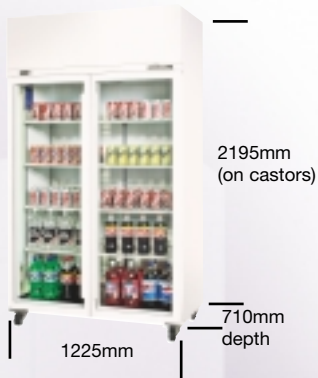

Model	Temp°C	HP	Amp	Shelves	Net Capacity
External dimensions 1225mm x 710mm x 2195mm					
EP2	+1/+4	3/8	4	4	1000 Litres

*Installation of all cabinets requires adequate ventilation
We reserve the right to change the specification without notice*

EP2SDCB

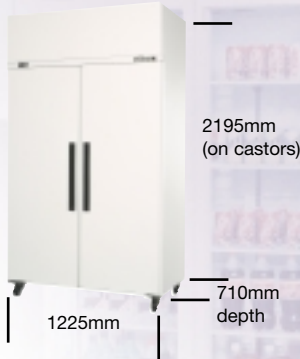

Options

- Solid doors
- Legs
- Illuminated sign housing.



Williams Refrigeration Australia Pty Ltd

7 Apoinga Street Dandenong Victoria 3175
Tel: (03) 9794 6745 Fax: (03) 9794 0257 FreeCall: 1800 338 148
Email: wra@access.net.au ABN 25 006 630 084



www.glynwed.com



Non Gastronorm Upright Refrigerators and Freezers

Ruby

Benefits

- Available in two or three door models
- Self contained or remote cabinets to suit all refrigeration requirements
- Forced draught cooler in both freezer and refrigerator models
- Colorbond® interior/exterior with stainless steel floor
- Adjustable digital thermostat for flexible cooling and accuracy
- Time saving and cost effective automatic defrost and vaporisers
- 100% CFC free polyurethane foam for greater insulation and added strength
- Double glazed doors with one-piece door frame
- Removable refrigeration module for easy replacement
- Rated for 43°C ambient working conditions
- Waste heat condensate tray
- Temperature ranges from -18° to +10°C
- Full length vertical fluorescent lighting for enhanced product display on glass door model.



HR2GDCB



H 2040mm
on castors

D 710mm

W 1000mm

HR3GDCB



H 2040mm
on castors

D 710mm

W 1467mm

LR2SDCB



Model	Temp°C	Amp	Shelves (per door)	Net Capacity (Litres)
2 Door External dimensions 1000mm x 710mm x 2040mm				
HR2	+1/+4	3.5	4	750
LR2	-18/-22	4.0	4	750
3 Door External dimensions 1467mm x 710mm x 2040mm				
HR3	+1/+4	4.5	4	1150
LR3	-18/-22	6.5	4	1150

Williams Refrigeration reserve the right to change specifications without notice.

Controls

- Digital microprocessor control with adjustable electronic thermostat and defrost interval to ensure excellent temperature control
- On/off switch for interior light (glass doors standard).

Construction

- Designed and manufactured to international quality standards
- Colorbond® interior and exterior except rear and under
- Stainless steel interior floor
- Self closing double glazed doors with 90° dwell
- Four PC adjustable shelves
- Front locking castors.

Refrigeration

Self Contained:

- Forced air refrigeration system
- 240 volt single phase power
- 43°C ambient operating temperature
- Waste heat condensate tray.

Remote:

- Forced air refrigeration system
- 240 volt single phase power
- Supplied with evaporator, digital thermostat and tx valve and condensate drain exit.

Options

- Stainless steel interior and exterior
- Solid doors (full or half)
- Legs (add 30mm to height)
- Pass through refrigerators (2 door only) Foodservice applications only.
- Custom colours and illuminated sign housing
- Locks
- Double glazed Argon Low E glass
- Heated double glazed doors
- Light in solid door model.



Colorbond®
Durability



Williams Refrigeration Australia Pty Ltd

38-42 Gaine Road Dandenong South Victoria Australia 3175
 Telephone: 03 8787 4747 Facsimile: 03 8787 4787 FreeCall: 1800 338 148
 Email: sales@williamsref.com.au www.williamsref.com.au ABN 25 006 630 084