

BREMA HIKU26A

BENCH TOP ICE CUBE MACHINE AND DISPENSER

The Brema HIKU26A is a benchtop ice machine and dispenser that produces 26kg of ice per 24 hours and has storage capacity of 7kg.

The HIKU26A produces crystalline 13g cubes and has an added ice dispenser function. It uses an optical sensor to dispense the ice making it completely hands-free, avoiding any human contact with the ice or the machine.

Designed to be installed on a bench or a stainless steel Brema HIKU TOWER, this HIKU26A is perfect for hotels, hospitals, canteens and anywhere that optimum sanitation is of fundamental importance .



STANDARD FEATURES

- 26kg production per 24 hours
- 7kg storage capacity
- Optical sensor ice dispenser
- Produces crystalline 13g cubes
- Production rated at 21°C air and 15°C water
- Fully insulated internal storage bin
- Electromechanical operation
- Stainless steel spray arm

13g Cubes



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

From the world of Comcater!

National Head Office
156 Swann Drive
Derrimut VIC 3030
Tel: +61 3 8369 4600
Fax: +61 3 8369 4695


Melbourne
96-100 Tope Street,
South Melbourne VIC 3205
Tel: +61 3 8369 4600
Fax: +61 2 8699 1299

Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Tel: +61 2 9748 3000
Fax: +61 2 9 648 4762

Brisbane
1/62 Borthwick Avenue
Murarrie QLD 4172
Tel: +61 7 3399 3122
Fax: +61 7 3399 5311

www.comcater.com.au

BREMA HIKU26A

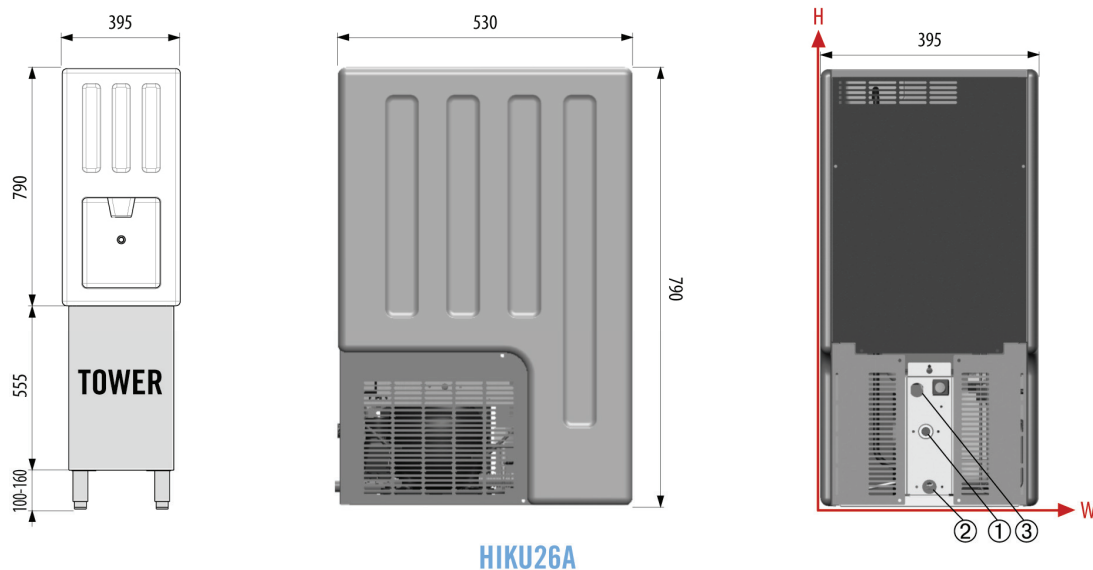

HIKU26A

Installation: countertop or combined with HIKU26 TOWER,* completely in stainless steel

*HIKU26 Tower optional

DIMENSIONS

395W x 530D x 790H mm

CONNECTIONS

Water inlet, Water outlet & Electrical connection

TECHNICAL DATA

Production 24h	26 kg
Storage Capacity	7 kg
Cooling System	Air
Cube	13 g
Refrigerant	R404A
Electrical Consumption	250W
Power Requirements	240V 10amp
Weight	41 kg

STANDARD ACCESSORIES

- Water Inlet Hose
- Drainage hose
- External Water Filter
- Pressure Limiting Valve

CONNECTIONS

	W	H
Water inlet	191 mm	136 mm
Water outlet	197 mm	36 mm
Electrical connection	175 mm	211 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



www.comcater.com.au

PROUDLY DISTRIBUTED BY: