

# **BREMA M350A**

#### **MODULAR ICE FLAKE MACHINE**

Brema's MUSTER range of modular ice flaker heads produces sub-zero flat ice flakes which automatically drop into a separate Brema storage bin.

The Brema M350A is a modular ice flaking machine that produces 400kg of flat ice flakes per 24 hours and is designed to fit on top of a range of Brema storage bins with differing capacities from 200kg to 550kg.

At between -5°C and -10°C, MUSTER flaked ice is ideal for processing, transporting and preserving foods. The ice is long-lasting, has a fast and efficient refrigerating effect and is easy to handle and dose.



#### STANDARD FEATURES

- 400kg production per 24 hours
- Can be installed on top of storage bins with capacities between 200kg and 550kg
- Produces flat ice flakes between -5°C and -10°C
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Electromechanical operation
- Powerful cylindrical evaporator and ice scraper system



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


# From the world of Concater!

National Head Office 156 Swann Drive Derrimut VIC 3030 Tel: +61 3 8369 4600 Fax: +61 3 8369 4695 Melbourne 96-100 Tope Street, South Melbourne VIC 3205 Tel: +61 3 8369 4600 Fax: +61 2 8699 1299 Sydney 20/4 Avenue of the Americas Newington, NSW 2127 Tel: +61 2 9748 3000 Fax: +61 2 9 648 4762 Brisbane 1/62 Borthwick Avenue Murarrie QLD 4172 Tel: +61 7 3399 3122 Fax: +61 7 3399 5311



## **BREMA M350A**



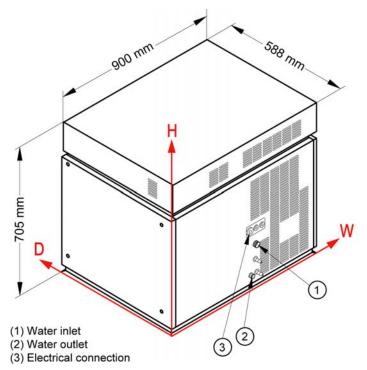

#### **DIMENSIONS**

900W x 588D x 705H mm

#### **CONNECTIONS**

Water inlet, Water outlet & Electical connection

#### **USABLE BIN**

BIN350, BIN550 V DS, DRB100

#### **TECHNICAL DATA**

Production 24h	400 kg
Cooling System	Air
Ice Type	Sub-zero flakes
Refrigerant	R404A
Electrical Consumption	2100W
Power Requirements	240V 15amp
Weight	137 kg

### **STANDARD ACCESSORIES**

- Water Inlet Hose
- Drainage hose
- External Water Filter
- Pressure Limiting Valve

CONNECTIONS	W	Н
Water inlet	463 mm	187 mm
Water outlet	428 mm	60 mm
Electrical connection	434 mm	257 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



PROUDLY DISTRIBUTED BY: