

E20-80

Tecnomac®

Blast Chillers / Freezers



NOTE: Ramp included

CAPACITY



80 KG

+95°C → +3°C



65 KG

+95°C → -18°C

MAXIMUM DIMENSIONS TROLLEY

870 (w) x 680 (d) x 1850 (h) mm

THICKNESS INSULATION

Walls: 70 mm

Floor: 60 mm

Options

- 20 mm floor (only if blast chilling 80% and maximum 20% blast freezing per day)
- Internal data storage card with gate to insert standard USB pen drive (pen drive not included)
- Sunken floor

REFRIGERATION ONLY

Self-contained

DEFROST

Hot gas and forced ventilation

Features

Code number	E20-80
Power supply	415V / 3N / 50HZ
Outside length	890 mm
Height	2410 mm
Depth	1250 mm
Max Trolley dimensions	870 (w) x 680 (d) x 1850 (h) mm
Compressor	Semi-hermetic
Refrigeration Power (-10°C/+45°C)	7410W / 12amp
Refrigeration Fluid	2500 g R404A
Output chilling (t= 90' +95°C/+3°C)	80 kg
Output freezing (t= 90' +95°C/-18°C)	65 kg
Absorbed power	3880W
Net/Gross Weight	353 / 430 kg
Packing Dimensions	1000 (w) x 1500 (d) x 2550 (h) mm

24 months materials and labour warranty

NOTE: All chill and freeze times quoted are based on using a 65mm deep GN pan filled to a height of 50mm. The chilling or freezing time will be affected by the density, water, fat and sugar content of the product.

All specification subject to change without notice

From the world of Comcater!

National Head Office
156 Swann Drive
Derrimut VIC 3030
Tel: +61 3 8369 4600
Fax: +61 3 8369 4695

Melbourne
96-100 Tope Street
South Melbourne VIC 3205
Tel: +61 3 8369 4600
Fax: +61 3 8699 1299

Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Tel: +61 2 9748 3000
Fax: +61 2 9648 4762





Brisbane
1/62 Borthwick Avenue
Murarrie QLD 4172
Tel: +61 7 3399 3122
Fax: +61 7 3399 5311

www.comcater.com.au

COMCATER
- foodservice equipment

E20-80

Tecnomac®

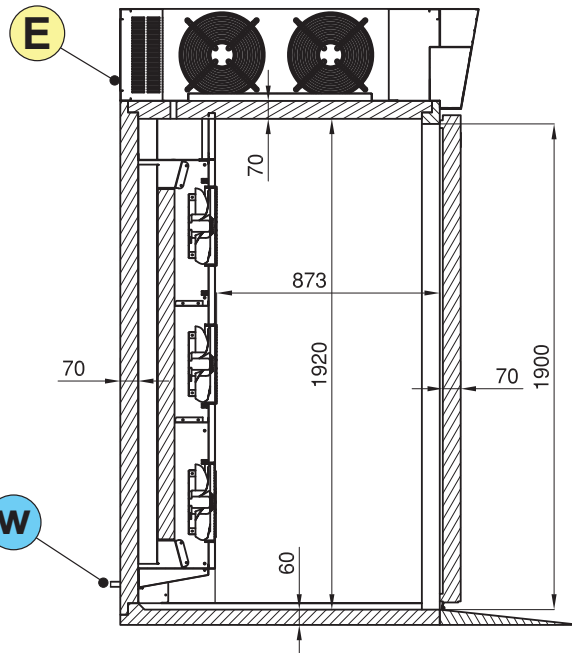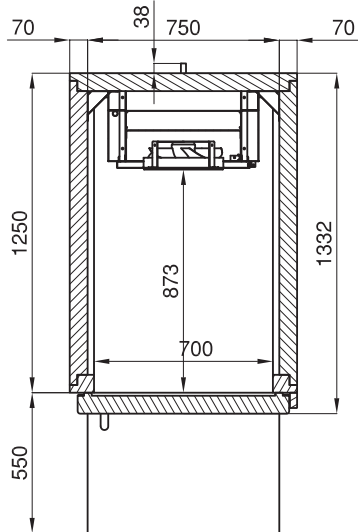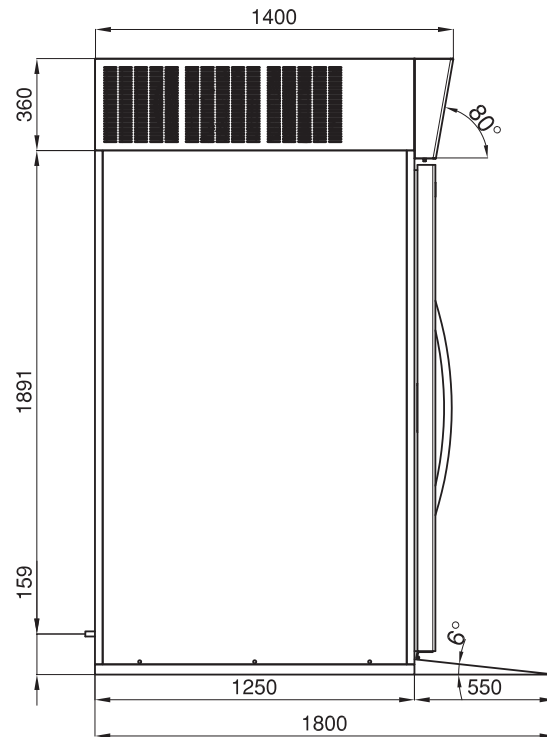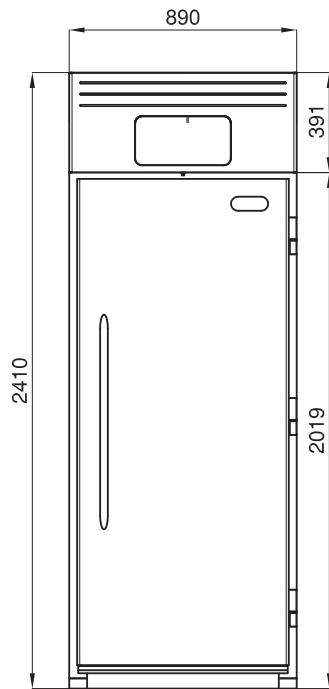

DRAINAGE DISCHARGE



ELECTRICAL CABLE SUPPLY