


Display Case

REFRIGERATED DISPLAY CASE RCD SERIES



HIGH-IMPACT LIGHTING
UNDER EACH SHELF FOR
OPTIMUM ILLUMINATION

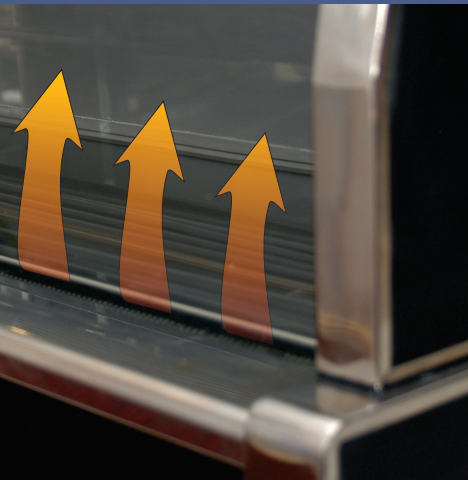

WARM AIR DIRECTED
UP FRONT OF UNIT
TO PREVENT CONDENSATION



EXCEPTIONAL REFRIGERATION
PERFORMANCE KEEPS CAKES
LOOKING BETTER FOR LONGER

DEALER:




RCD-12

Product
Data Sheet


KOLDTECH

The Technology of Excellence


FRONT VIEW

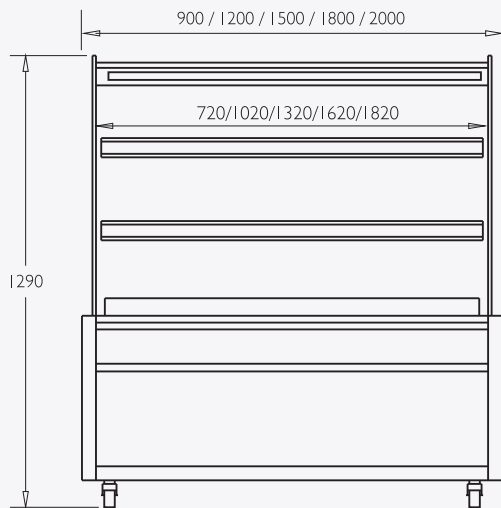

SIDE VIEW

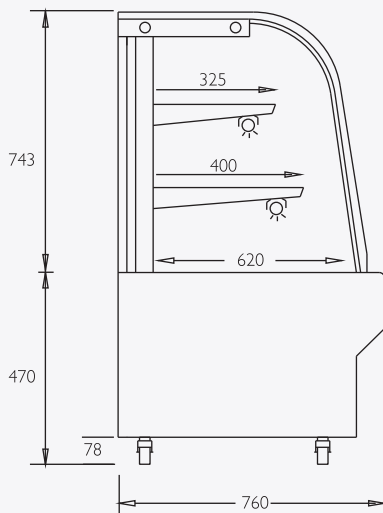

TOP VIEW

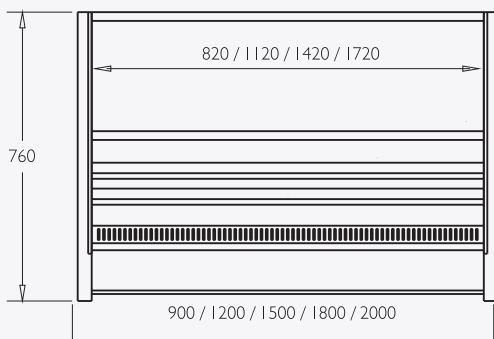

Matching hot units available - ask about our HCD series

RCD-SERIES CURVED DISPLAY CASE

PERFORMANCE AND OPERATING CONDITIONS

RCD series cake displays are designed to hold products at below 5°C. Thermostat adjustable between 2°C & 15°C for products requiring different holding temperatures. The RCD series cake display are rated to operate at ambient temperatures up to 32°C. Glass is guaranteed to remain free of condensation at up to 70% relative humidity.

STANDARD FEATURES

REFRIGERATION SYSTEM

Reliable self contained, bottom mounted refrigeration system using environmentally friendly R404a refrigerant. All ventilation at rear of cabinet. Refrigeration system easily serviceable from removable panel at rear of unit. No drainage connection required.

CONTROLLER

Microprocessor controlled with adjustable digital temperature display. Separate power and light switches.

BODY & FURNISHING

Double glazed curved front glass with warm air directed up front of unit to prevent condensation. Self closing double glazed sliding rear doors with one way mirror finish (RCD-9 equipped with double glazed rear swinging doors.) Steel frame for extra strength. Insulated exterior powdercoated panels finished in matt black. All internal surfaces are bright polished 304 grade stainless steel. Glass top rear serving shelf. Supplied on 50mm removable castors for ease of cleaning. Exterior cabinet trim finished with bright polished 304 grade stainless steel.

SHELVES

3 glass display shelves, each with illuminated high impact lighting. Top two shelves fully adjustable.

WARRANTY

12 months onsite parts & labour.

TECHNICAL DATA

RCD - 9

Watts	504
Cooling capacity (Btu) Compressor (Hp)	1484 / 1/6

RCD - 12

Watts	600
Cooling capacity (Btu) Compressor (Hp)	1484 / 1/6

RCD - 15

Watts	1008
Cooling capacity (Btu) / Compressor (Hp)	2484 / 1/3

RCD - 18

Watts	1512
Cooling capacity (Btu) / Compressor (Hp)	3337 / 1/2

RCD - 20

Watts	1512
Cooling capacity (Btu) / Compressor (Hp)	3600 / 1/2

Continued product improvement is WELBILT Manufacturing Ltd policy. Specifications are subject to change without notice

MANUFACTURED BY WELBILT MANUFACTURING LTD. IMPORTED BY TOM STODDART PTY LTD,
WARRANTY, SERVICE & DEALER ENQUIRIES: (07) 3344 2444 FAX: (07) 3345 6403

BRISBANE (QLD)
(07) 3344 2444 FAX: (07) 3345 6403
SYDNEY (NSW & ACT)
(02) 8846 5999 FAX: (02) 8846 5900
MELBOURNE (VIC & TAS)
(03) 9584 5677 FAX: (03) 9584 6744

PERTH (WA)
(08) 9418 2477 FAX: (08) 9418 2588
ADELAIDE (SA & NT)
1300 79 1954

KOLDTECH
The Technology of Excellence

