



AGB & AFB SERIES:- BENCH REFRIGERATOR & FREEZERS



AGB30-7L2: Refrigerator
AFB30-7L2: Freezer



AGB50-7L3: Refrigerator
AFB50-7L3: Freezer

Note: Photo Show cabinets fitted with optional legs.
Overall height on standard castor 880mm.

FEATURES:

- Temperature range
Fridge: +1° to +10° C @ 38°C ambient
Freezer: -18° to -22° C @ 38°C ambient
- Stainless steel series 340 exterior doors, fronts & Sides
- Stainless steel interior floor with coved corners
- Stucco aluminium back panel
- Recessed handles.
- Self closing hinged doors with 90° stay open feature
- LED digital temperature display
- PVC coated adjustable steel shelves
- Automatic defrost. Duration can be changed to suit environment.
- Removable door gasket to allow cleaning
- 60mm Energy-efficient polyurethane insulation.
- Utilizes environmentally friendly R-134A and R404A refrigerants.

MAIN DATA

Specifications are subject to change without notice. E&OE.

Model	Average Temp	Doors	Volume (Gross It)	Shelves	External Dimensions (mm)	Voltage	Power Outlet	Cord Length	Shipping Weight
AGB30-7L2	+2°C	2	318	2	1400w x 700d x 880h	240v/50hz	10amp	2.4	103kg
AFB30-7L2	-18°C	2	318	2	1400w x 700d x 880h	240v/50hz	10amp	2.4	123kg
AGB50-7L3	+2°C	3	495	3	1875w x 700d x 880h	240v/50hz	10amp	2.4	116kg
AFB50-7L3	-18°C	3	495	3	1875w x 700d x 880h	240v/50hz	10amp	2.4	136Kg

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572

Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com



AGB & AFB SERIES:- BENCH REFRIGERATOR & FREEZERS

Specification

- **Refrigeration System:** Fully balanced self contained condensing unit with forced draught evaporator.
- **Condensing unit:** Right hand side. Unit access from front thru hinged cover. Ventilation on all three sides for cooler running
- **Refrigerant:** Environmentally friendly
Refrigerator - R134A.
Freezer - R404A
- **Defrost:**
Fridge:- Cyclic defrost. Supplemented with timed defrosts via electronic controller.
Freezer:- Electric Defrost. No of defrost variable to suit usage
- **Condensate Disposal:** No-cost, hot gas condensate disposal. No need for a tundish (drain).
- **Electronic Controller:** Italian designed, Carel temperature controller and digital display.
- **Shelves:** 1 height adjustable, PVC coated, shelf per door. Fitted on stainless steel tray slides.

- **Operation conditions:**
Fridge: 0° to 10° @38°C ambient.
Freezer : -18° to -22° @38°C ambient.
- **Electrical:** Units come ready for connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.
- **Construction:** Stainless Steel doors, front and sides provide a clean and dent resistant cabinet. Clear anodized aluminum back.
- **Inner:** Stainless Steel inner with inner tray designs with covered corners for easy cleaning.
- **Insulation:** 50mm high density polyurethane foamed in place, Blowing agent, cyclopentane for CFC free Ozone protection and superior insulating properties. .
- **Door:** Solid Stainless Steel door. Hinging: Self closing with a dwell open position for easy loading and unloading.
- **Gasket:** PVC welded one piece magnetic gasket. Removable without the need for tools.


- **Castors:** 4 (2 x locking) swivel heavy duty castors.
- **Warranty¹:** Austwide's Manufacturer warranty 12 month parts and labour. See terms and conditions of sale for full description.

Options

- Additional shelves.
- Additional tray slides.
- Legs replacing castors.
- Low profile castors.

ELEVATIONS. (not to scale)

¹.terms and conditions apply. Visit web site for full details. www.austwidesales.com.au
Specifications are subject to change without notice. E&OE.

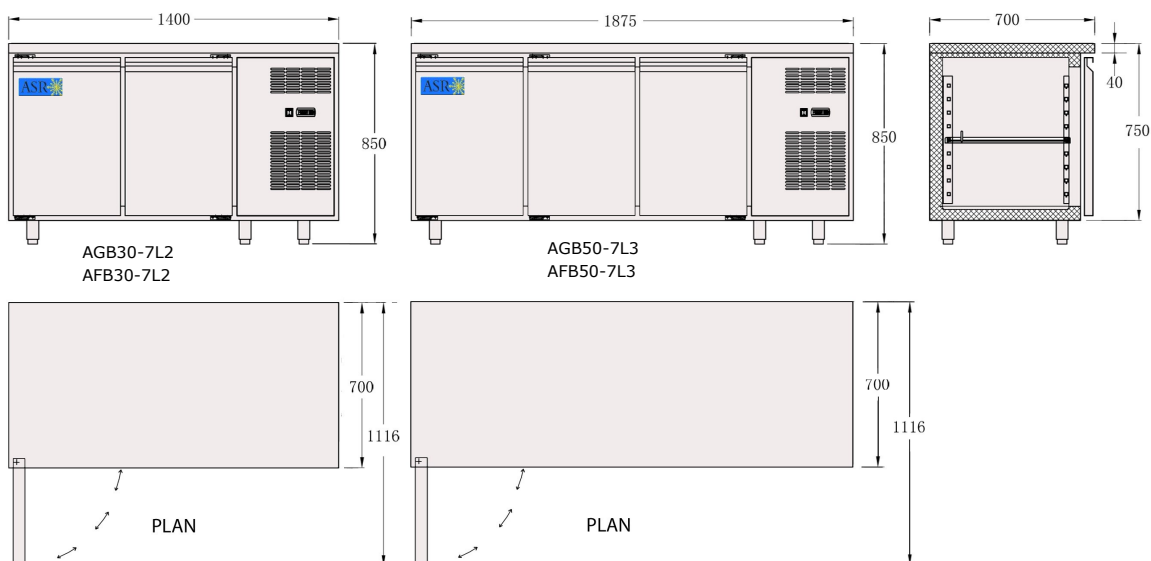

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572

Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com