



Model BFB1560GD shown

## Impressive standard features include:

- Sturdy magnetic-closing glass doors with extra large handles
- High density polyurethane foam insulation
- Stainless steel exteriors
- High volume fan cooling system circulates cold air from the top of the internal cabinet for superior cooling and consistent temperature throughout.
- Self-evaporating drainage system
- Drain plug for easy cleaning
- Fully Programmable Auto Defrost cycle
- Heated glass doors for clear visibility
- Epoxy coated shelves
- Easy to use control panel with digital controller
- Chiller temperature range +1°C to +4°C (rated at 32°C)
- Internal lighting
- Supplied with 100mm castors (two with brakes)
- Exclusive 13 month on-site warranty




Easy to use digital control




Adjustable epoxy coated shelves

**SPECIFICATIONS**

Model	External Dimension inc handles (mm)	Internal Dimension (mm)	Gross Volume (Litres)	Refrigerant / grams	Temp. Range Celsius	Ambient Temp. Celsius	Compressor	Voltage/ Amps	Net Weight (Kgs)	Gross Weight (Kgs)	Cooling System	Temp. Control	Shelf Qty
BFB1260GD	1200 x (600+50) x 840	740 x 419 x 584	280	R134a 360g	+1 to +4	32	1/6HP	240V 4.0A	92	122	Forced Air Circulation	Digital	4
BFB1560GD	1500 x (600+50) x 840	987 x 419 x 584	335	R134a 340g	+1 to +4	32	1/4HP	240V 4.0A	107	137	Forced Air Circulation	Digital	4
BFB1860GD	1800 x (600+50) x 840	1292 x 419 x 584	435	R134a 360g	+1 to +4	32	1/4HP	240V 4.0A	117	147	Forced Air Circulation	Digital	4

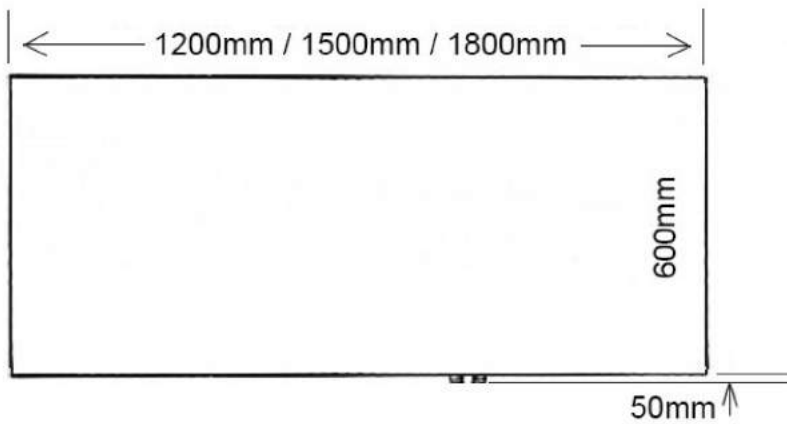

TOP VIEW

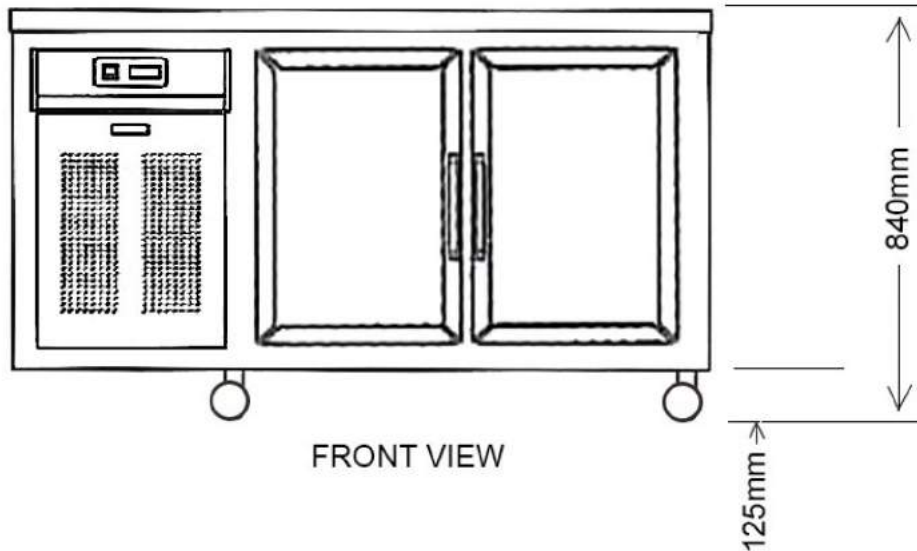

FRONT VIEW

DUE TO OUR POLICY OF CONTINUAL PRODUCT DEVELOPMENT, ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE