

ONWAVE 2 HP_{5E}

MULTI-DECK CHILLER




FEATURES INCLUDE:

White internal
RAL 9002 grey white external
RAL 9007 Base Panel
High efficiency fan motors
Stainless steel front bumper
5 levels adjustable shelves + base

Shelf pricing holders
LED canopy lighting incl. switch
Electronic temperature control
Manual night blind
Castor wheels
Shelf product fences (optional)

ONWAVE 2 HP_{5E}

MULTI-DECK CHILLER

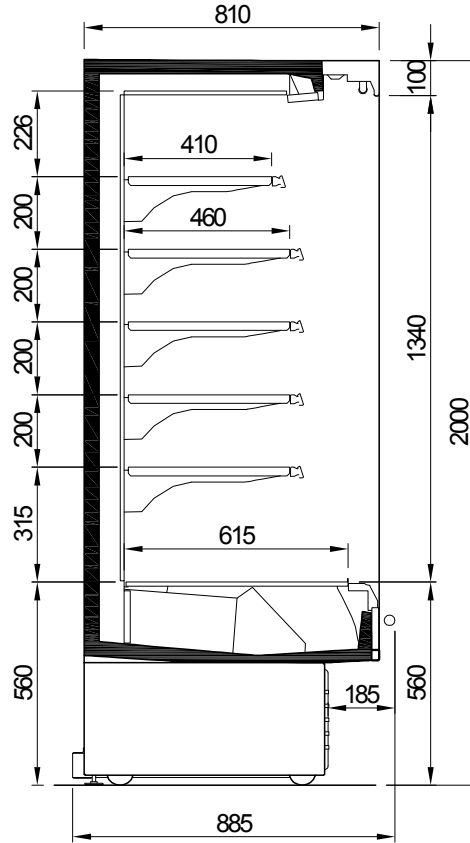

ONWAVE 2 HP 5E	937	1250	1875	2500
* Operating Temp (°C)	+2/+4	+2/+4	+2/+4	+2/+4
Refrigeration	Ventilated/R404a			
Defrost	Automatic			
Power Supply	230V/1Ph/10 Amp plug		230V/1Ph/15 Amp plug	
Operating Current (Amp)	4.8	5.3	8.8	13.9
Nominal Power (W)	1104	1208	1666	2430
Energy Consumption (kWh/24h)	23.5	25.7	35.4	51.6
Lighting Power (W)	39	54	78	108
Display Surface (m ²)	2.68	3.58	5.37	7.17
Length (mm) with endwall	997	1310	1935	2560
Height incl. castors (mm)	2000	2000	2000	2000
Depth with bumper (mm)	885	885	885	885
Weight with packaging (kg)	260	280	430	500
Weight w/o packaging (kg)	240	260	400	460

* Climate class 3 (25°C, 60%R/H)