

ONWAVE 3 GREEN 4E/MIR360

MULTI-DECK CHILLER




FEATURES INCLUDE:

White internal
RAL 9002 grey white external
RAL 9007 Base Panel
High efficiency fan motors
Stainless steel front bumper
5 levels adjustable shelves + base

Shelf pricing holders
LED canopy lighting incl. switch
Electronic temperature control
Manual night blind
Castor wheels
Shelf product fences (optional)

ONWAVE 3 GREEN 4E/MIR360

MULTI-DECK CHILLER

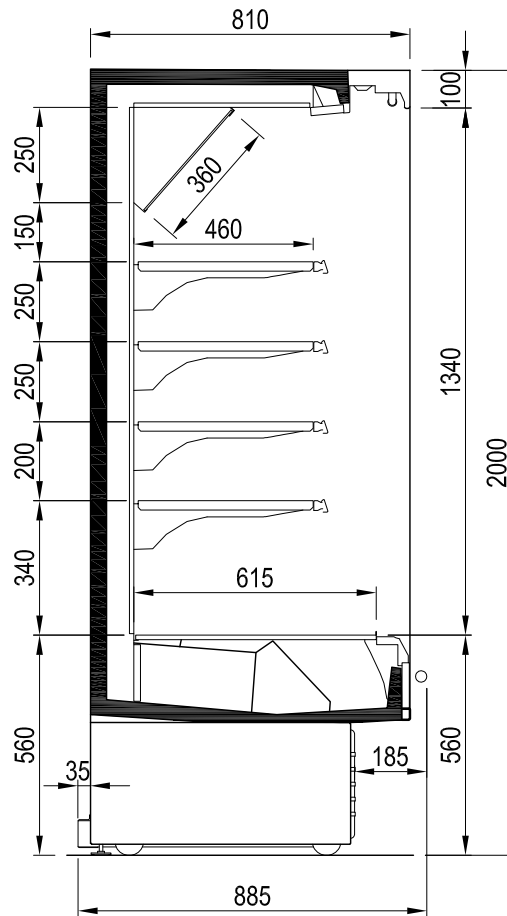

ONWAVE 3 GREEN 4E/MIR360	937	1250	1875	2400
Operating Temp. (°C)	0/+2			
Refrigeration	Ventilated/R290			
Defrost	Automatic			
Power Supply	230V/1Ph/10 Amp plug		230V/1Ph/15 Amp plug	
Operating Current (Amp)	4.95	4.92	8.77	9.2
Nominal Power (W)	1200	1200	2100	2200
Energy Consumption (kWh/24h)	20.92	20.78	35.95	37.73
Display Surface (m ²)	2.68	3.58	5.37	7.17
Length incl. endwalls (mm)	997	1310	1935	2560
Height incl. castors (mm)	2000	2000	2000	2000
Depth incl. bumpers (mm)	885	885	885	885
Weight with packaging (kg)	260	280	430	500
Weight w/o packaging (kg)	240	260	400	460

* Climate class 3 (25°C, 60%R/H)