



PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Hinged rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Sliding front doors - optional


CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point

Model	Cabinet			Shelving no.	Shelf length	base tray w x d	Total food units	Display m2
	Length mm	Depth mm	Height mm				100 x 100	
BTGHT6	600	750	1380	4 + base	495 x 445	540 x 510	100	1.16

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents





Operating Current	Connection	Voltage
		50/60 Hertz
4.1 Amp	10amp 3 pin plug	240V



ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

Maximum shelf load weight 15kg
spread evenly

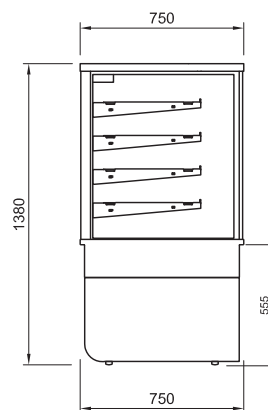

REAR VIEW





PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Sliding front doors - optional

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point

Model	Cabinet			Shelving no.	Shelf length	base tray w x d	Total food units	Display m2
	Length mm	Depth mm	Height mm				100 x 100	
BTGHT9	900	750	1380	4 + base	795 x 445	840 x 510	160	1.86






* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

Operating Current	Connection	Voltage
		50/60 Hertz
6.2 Amp	10amp 3 pin plug	240V

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

Maximum shelf load weight 15kg
spread evenly

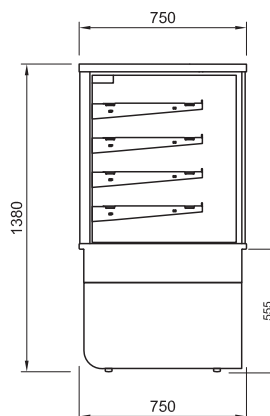

REAR VIEW





PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Sliding front doors - optional

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point

Model	Cabinet			Shelving no.	Shelf length	base tray w x d	Total food units	Display m2
	Length mm	Depth mm	Height mm				100 x 100	
BTGHT12	1200	750	1380	4 + base	1095 x 445	1140 x 510	231	2.55






* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

Operating Current	Connection	Voltage
		50/60 Hertz
8.3 Amp	10amp 3 pin plug	240V

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

Maximum shelf load weight 15kg
spread evenly

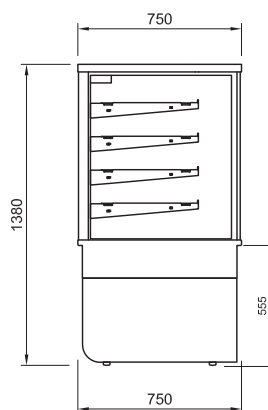

REAR VIEW





PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Sliding front doors - optional


CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point

Model	Cabinet			Shelving no.	Shelf length	base tray w x d	Total food units	Display m2
	Length mm	Depth mm	Height mm					
BTGHT15	1500	750	1380	4 + base	1095 x 445	1140 x 510	100 x 100 231	3.2

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents





Operating Current	Connection	Voltage
		50/60 Hertz
10.4 Amp	15 AMP 3 PIN PLUG	240V

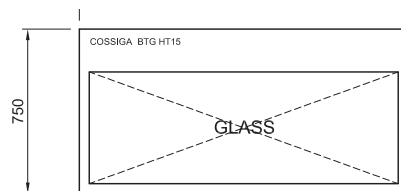

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

Maximum shelf load weight 15kg
spread evenly

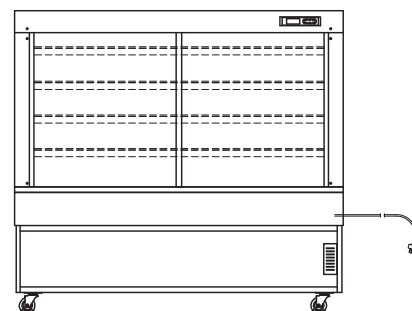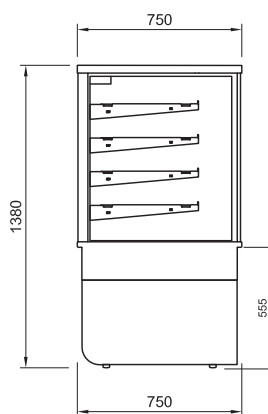

REAR VIEW