

# ETHOS

MULTI-DECK CHILLER



## FEATURES INCLUDE:


External/internal stainless steel AISI 304  
LED canopy lighting incl. switch  
4 level height adjustable refrigerated  
shelves + base  
Manual night blind

Evaporator with anti corrosion treatment  
Shelf pricing holder  
Glass or solid endwalls  
Castor wheels (optional)  
Doors (optional)

# ETHOS

MULTI-DECK CHILLER

**CRIOCABIN**  
TASTE PRESENTATION

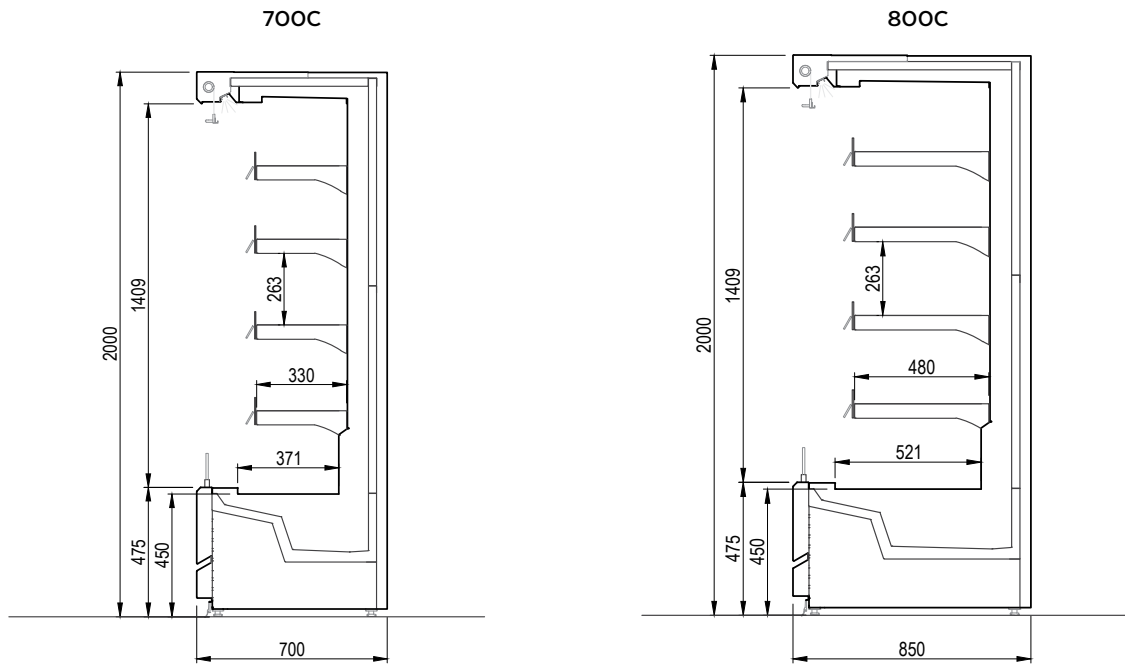

ETHOS 700C	**937	**1250	**1875	**2500
* Operating Temp (°C)	+2/+4	+2/+4	+2/+4	+2/+4
Refrigeration	Ventilated/R404a			
Defrost	Automatic			
Power Supply	230V/1Ph/10 Amp plug		230V/1Ph/15 Amp plug	
Operating Current (Amp)	11.1	12.8	15.7	11
Nominal Power (W)	1911	2208	2712	4400
Power Requirements (Amp)	11.1	12.8	15.7	/
Display Surface (m2)	1.59	2.13	3.19	4.25
Depth w/o bumpers (mm)	700	700	700	700
Depth w bumpers (mm)	786	786	786	786
Weight w/o packaging (kg)	370	390	415	450
Length w/o endwalls (mm)	937	1250	1875	2500
Solid endwall thickness (mm)	70	70	70	70
Glass endwall thickness (mm)	30	30	30	30
Height w/o castors (mm)	2000	2000	2000	2000
Height incl. castors (mm)	2086	2086	2086	2086
ETHOS 800C	**937	**1250	**1875	**2500
* Operating Temp (°C)	+2/+4	+2/+4	+2/+4	+2/+4
Energy consumption (kWh/24h)	34.4	39.7	48.8	79.2
Display Surface (m2)	2.10	2.80	4.20	5.60
Depth w/o bumpers (mm)	850	850	850	850
Depth w bumpers (mm)	886	886	886	886
Weight w/o packaging (kg)	380	400	425	460

\* Climate class 3 (25°C, 60%R/H)

\*\* Ex factory item