


SPECIFICATIONS

LCU323-UDDD

520 Series 3-Door Integral Counter Freezer

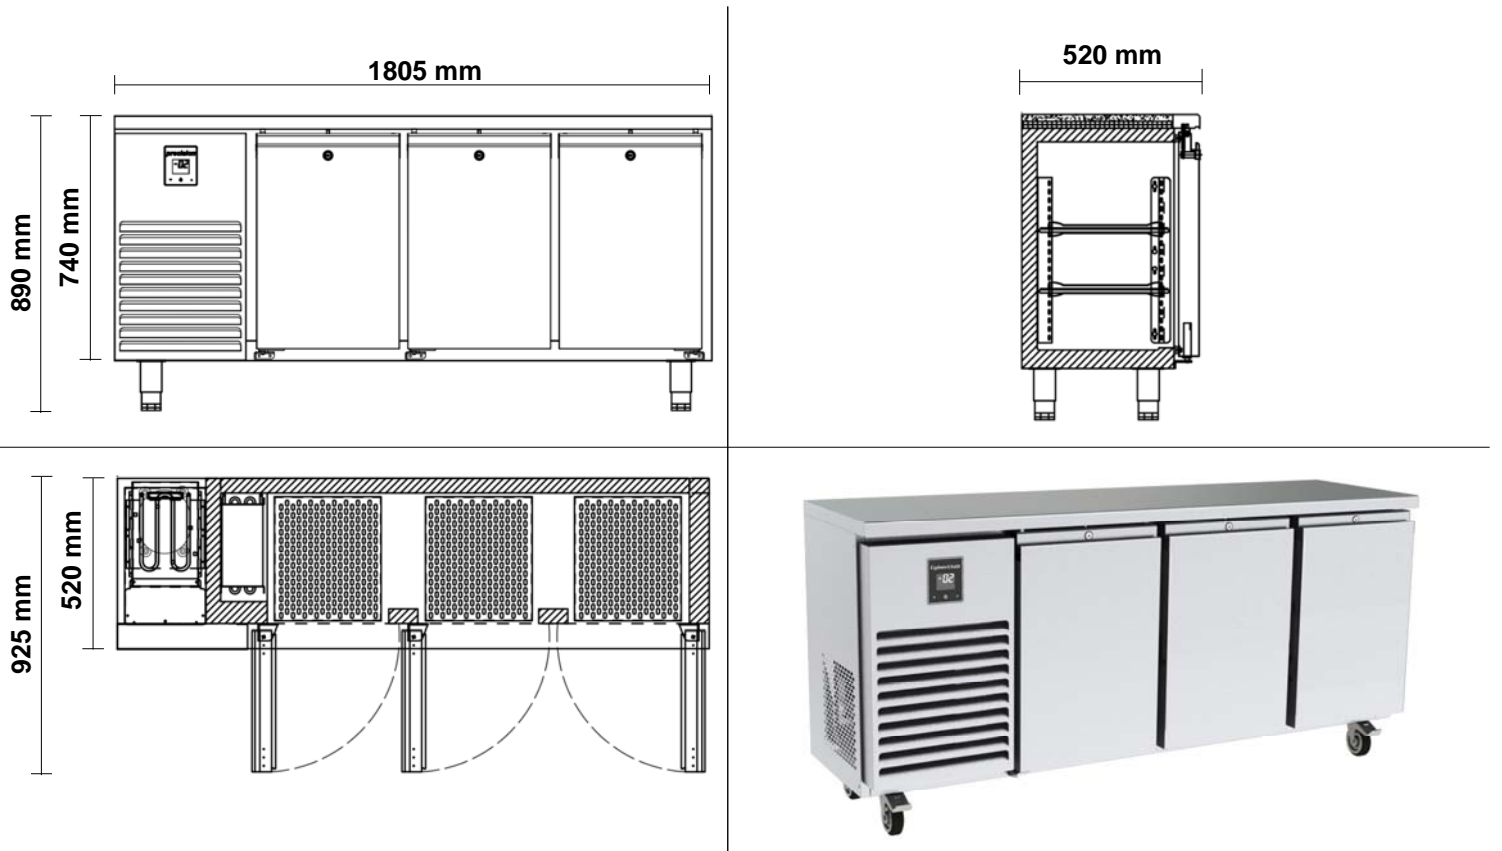

SPECIFICATIONS			
Refrigeration system	Electronic controlled, self-contained, side mounted, refrigeration unit		
Refrigerant	R404a / 240g		
Nominal capacity	480 Watts @ -30°C SST		
Cabinet internal volume	180 litres		
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet temperature range	-18°C to -22°C up to 43°C ambient		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Electrical	220-240 Volts a.c. 50 Hz, 3.7 Amps		
kWh/24hr	8.79		
Internal door opening size	3 door opening, accepts full 2/3 or 2 x 1/3 GN pans		
Doors	Stainless steel, self-closing, lockable solid door		
Worktop	Removable stainless steel worktop		
Shelves	2 shelves & adjustable tray slides per door (Total 6)		
Weight	130kg		
Cabinet dimensions	External	Internal	
	Width	1805mm	1285mm
	Depth	520mm	400mm
	Height	700mm*	600mm

OPTIONS
• Glass Doors
• Bank of 2 Drawers
• Bank of 3 Drawers
• Remote Units
• Castors (standard on 150mm legs)
• Splashbacks
• Extended Worktops
• No Worktop
• Different Heights
• Raised Pan Grid
• Countertop Well
• Over-shelf / Gantry
• Water-cooled
• Extra Shelves
• Extra Slides
• ST/ST Back
• Heli-coil Cable
• Hydrocarbon Refrigerant
• HFO Refrigerant

* Height excludes castors, legs or SS worktop