

specifications

Refrigeration

RF7.UBF.3.SD

ReFlex Series, 3 Door (Solid), Underbench Freezer



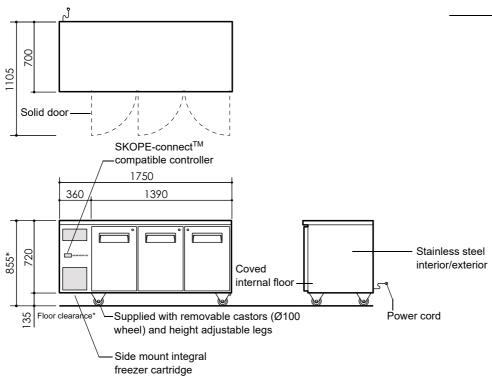

CABINET

Model ID RF7.UBF.3.SD SKOPE ID RF7UBF3-SCLH-SD

Doors 3 × self-closing, lockable, solid swing doors. LH, LH, RH

Internal door opening 3 × door openings: 560mm high × 360mm wide

Shelves 6 × adjustable height shelves: 4 × outside 395mm wide × 510mm deep, 2

× middle 455mm × 510mm deep

Worktop Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating

cyclopentane foamed core)

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

ELECTRICAL

Climate class 5 (40°C/40% RH)

Interior lighting 2 × 400mm, 4W LED light (door activated)
Power cord Supplied with 2.6m, 10 Amp plug and lead
Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 4.0 Amps (includes unit 2.0 Amps)

REFRIGERATION

Controller | SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Side mounted, integral, removable freezer cartridge (part number

ULKDNI-0023)

Refrigerant R290 / 90g (natural refrigerant)

Nominal capacity 500 Watts

Heat rejection (Avg/peak)

Drainage

225 Watts/290 Watts

No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

		4	B 16	SIC		
	IIV	/1 🗀	1/1,	-11) [_
_	1 I V	-		∵ । ∨	/ I V	_

	External	Internal	
Height	855mm*	570mm	
Width	1750mm	1280mm	
Depth	700mm	530mm	
Floor area	1.23m ²	•'	
Weight	136kg		
Internal volume	387 litres		

^{*} With supplied castors fitted. See height variation below

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	720mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements		
Тор	Not required	
Sides	Not required	
Back	Not required	

Bottom

PSS0632 Rev. 1.4 Aug. 2019



