
## specifications

## Refrigeration

## RF7.UBR.3.SD

ReFlex Series, 3 Door (Solid), Underbench Fridge



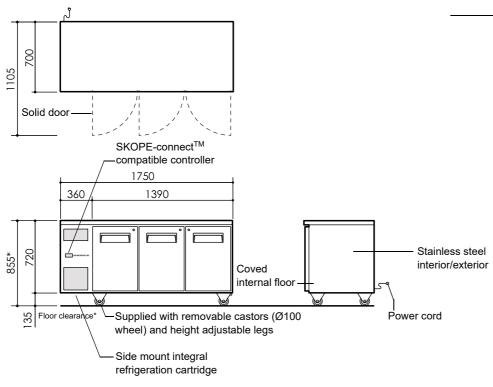

CABINET

Model ID RF7.UBR.3.SD SKOPE ID RF7UBR3-SCLH-SD

Doors 3 × self-closing, lockable, solid swing doors. LH, LH, RH

Internal door opening 3 × door openings: 560mm high × 360mm wide

Shelves 6 × adjustable height shelves: 4 × outside 395mm wide × 510mm deep, 2

 $\times$  middle 455mm  $\times$  510mm deep

Worktop Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating

cyclopentane foamed core)

Material 304 AISI stainless steel interior and exterior

**PERFORMANCE** 

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable with SKOPE-connect -2°C to 10°C)

**ELECTRICAL** 

Climate class 5 (40°C/40% RH)

Interior lighting 2 × 400mm, 4W LED light (door activated)
Power cord Supplied with 2.6m, 10 Amp plug and lead
Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 2.0 Amps (includes unit 1.5 Amps)

**REFRIGERATION** 

Controller SCS Connect (SKOPE-connect<sup>TM</sup> compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Side mounted, integral, removable refrigeration cartridge (part number

ULKCNI-0022)

Refrigerant R290 / 95g (natural refrigerant)

Nominal capacity 650 Watts

Heat rejection (Avg/peak) 110 Watts/120 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

## SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

	ΙΝ Л			$\sim$	
	111/1		$\sim$		NS
_		_	40	$\sim$	1

	External	Internal	
Height	855mm*	570mm	
Width	1750mm	1280mm	
Depth	700mm	530mm	
Floor area	1.23m <sup>2</sup>	•'	
Weight	130kg		
Internal volume	387 litres		

<sup>\*</sup> With supplied castors fitted. See height variation below

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	720mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation red	quirements
Тор	Not required
Sides	Not required
Back	Not required
Bottom	Not required

PSS0586 Rev. 1.4 Aug. 2019



