


# specifications

## RF8.UPC.2.SD

ReFlex Series, 2 Door (Solid), Upright Combo, Fridge/Freezer

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

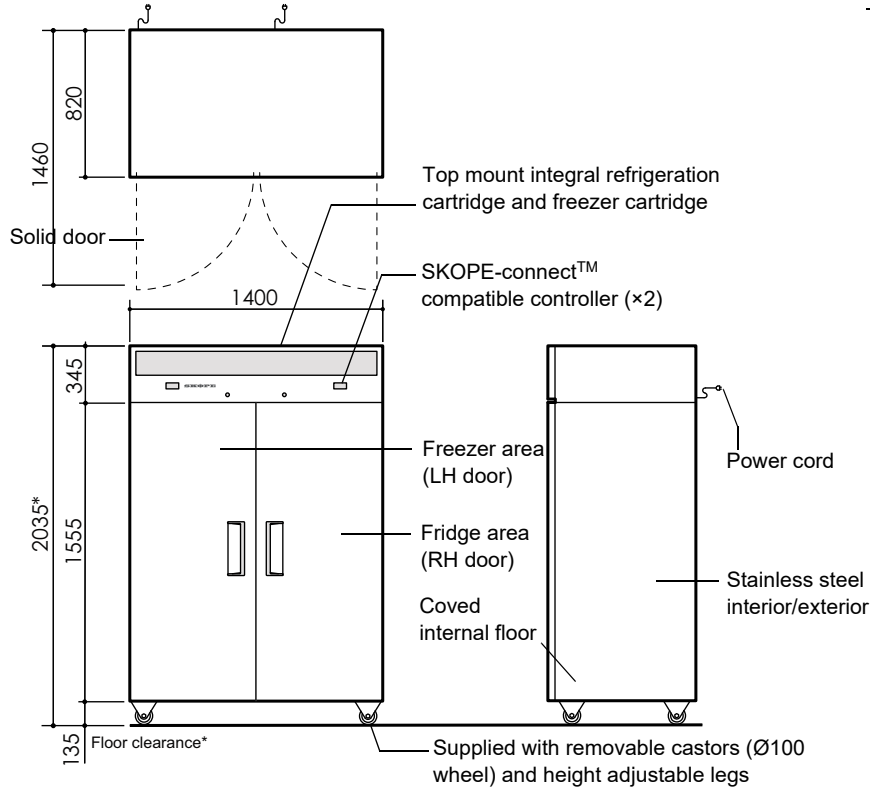

CABINET	
Model ID	RF8.UPC.2.SD
SKOPE ID	RF8UPC2-SCTP-SD
Doors	2 × self-closing, lockable, solid swing doors. LH, RH
Internal door opening	2 × door openings: 1415mm high × 545mm wide
Shelves	10 × adjustable height shelves: 530mm wide × 595mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	Fridge: 1°C to 4°C (adjustable with SKOPE-connect -2°C to 10°C) Freezer: -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)
ELECTRICAL	
Climate class	5 (40°C/40% RH)
Interior lighting	2 × 1200mm, 12W LED light (door activated)
Power cord	Supplied with 1 × 2.9m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	6.0 Amps (includes units 1.5 Amps and 2.0 Amps)
REFRIGERATION	
Controller	2 × SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Top mounted, integral, removable refrigeration cartridge (UTKCNI-0017), and top mounted, integral, removable freezer cartridge (UTKDNI-0019)
Refrigerant	Fridge: R290 / 70g, Freezer: R290 / 94g (natural refrigerant)
Nominal capacity	Fridge: 450 Watts, Freezer: 550 Watts
Heat rejection (Avg/peak)	Fridge: 95 Watts/110 Watts, Freezer: 300 Watts/375 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal (×2)
Height	2035mm*	1435mm
Width	1400mm	550mm
Depth	820mm	655mm
Floor area	1.15m <sup>2</sup>	
Weight	227kg	
Internal volume	513 litres (×2)	

\* With supplied castors fitted. See height variation below

Height variation	
Supplied castors	2035mm
Supplied height adjustable legs	2045-2085mm
No castors or legs	1915mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

PSS0592 Rev. 1.3 Aug. 2019

**SKOPE INDUSTRIES LIMITED**

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com