

# SHAMROCK



by

**Austwide**  
sales and rentals pty ltd

## GFG:- SOLID DOOR 1/1 GASTRONORM BENCH REFRIGERATOR SERIES



GFG1365S



GFG1800S



GFG2200S

### GFG Series

#### FEATURES:

- SHAMROCK 's GFG Glass Door Refrigerators are designed to accept 1/1 gastronorm trays.
- Operating Temperature 0° to +5° C. Climate Type N.
- Only requires one a standard power point (GPO):- 240V 50Hz 10 amp.
- Digital Temperature Display.
- 1 height adjustable shelf per door.
- Stainless steel fascia and outer sides and clear anodized aluminum outer back..
- Stainless Steel inner.
- Stainless Steel work top with bull nose front edge.
- Internal floor with coved corners allows for easy cleaning and sanitizing.
- Extra Large castors, for ease of cabinet movement.
- Stainless Steel Solid Doors, Designed with horizontal handle and self closing torsion bar hinging.

### MAIN DATA

Specifications are subject to change without notice. E&OE.

Model	Doors	Volume (Gross lt)	Shelves	Width (mm)	Depth (mm)	Height (mm)	Voltage	Power Outlet	Cord Length	Shipping Weight
<b>GFG1365S</b>	2	314	2	1365	700	860	240v/50hz	10amp	2.4	113kg
<b>GFG1800S</b>	3	465	1	1795	700	860	240v/50hz	10amp	2.4	155kg
<b>GFG2200S</b>	4	616	1	2230	700	860	240v/50hz	10amp	2.4	173Kg

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572  
Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com

# SHAMROCK



by

**Austwide**  
sales and rentals pty ltd

## GFG:- SOLID DOOR 1/1 GASTRONORM BENCH REFRIGERATOR SERIES

### Specification

- **Refrigeration System:** Fully balanced self contained condensing unit with forced draught evaporator.
- **Condensing unit:** Left hand side. Unit access from front thru hinged cover. Condenser fitted with filter for easy cleaning.
- **Refrigerant:** R134A.
- **Defrost:** Cyclic defrost, with no-cost, hot gas condensate disposal. Supplemented with timed defrosts via electronic controller.
- **Electronic Controller:** Italian designed, Dixell temperature controller and digital display. Includes high temp alarm.
- **Evaporator:** Epoxy coated to eliminate the potential of corrosion and thus future gas leaks.
- **Shelves:** 1 height adjustable, PVC coated, shelf per door. Fitted on stainless steel tray slides.
- **Operation conditions:** 0° to 5° C. at up to 32° C ambient.
- **Electrical:** Units come ready for

connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.

- **Construction:** Stainless Steel doors, front and sides provide a clean and dent resistant cabinet. Clear anodized aluminum back.
- **Inner:** Stainless Steel inner with inner tray designs with coved corners for easy cleaning.
- **Insulation:** 50mm high density polyurethane foamed in place, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties. .
- **Door:** Double glazed Low E glass doors with aluminum frame. Hinging: Self closing with a dwell open position for easy loading and unloading.
- **Gasket:** PVC welded one piece magnetic gasket. Removable without the need for tools.
- **Castors:** 4 ( 2 x locking) x 75mm swivel heavy duty castors.
- **Warranty<sup>1</sup>:** Austwide's Manufactur-


ers warranty 12 month parts and labour. See terms and conditions of sale for full description.

### Options

- Available with glass doors.
- Additional Shelves
- Additional tray slides

### ELEVATIONS. (not to scale)

<sup>1</sup>.terms and conditions apply. Visit web site for full details. [www.austwidesales.com.au](http://www.austwidesales.com.au)  
Specifications are subject to change without notice. E&OE.

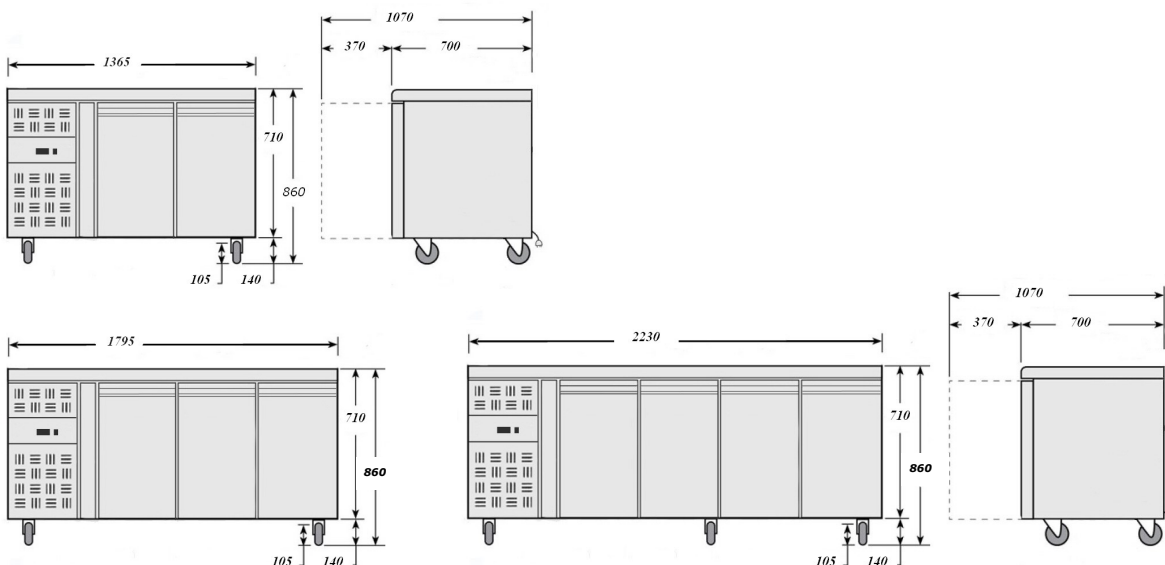

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572  
Email: [sales@austwiderentals.com](mailto:sales@austwiderentals.com) websites: [www.austwidesales.com.au](http://www.austwidesales.com.au) or [austwiderentals.com](http://austwiderentals.com)