



PRODUCT FEATURES

- Open front 1500mm high
- Stainless steel hinged rear door
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable glass shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Pull down night blind


CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

| Model | Cabinet | | | Shelving no. | SHELVES SIZE | | | | Total food units | Display m2 |
|--------|-----------|----------|-----------|--------------|--------------|---------|---------|-----------|------------------|------------|
| | Length mm | Depth mm | Height mm | | TOP | 2ND | 3RD | BASE(WXD) | | |
| TTGOR6 | 600 | 750 | 1500 | 3+BASE | 490X295 | 490X325 | 490X415 | 545X515 | 75 | .78 |

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| Refrigerant | Operating Current | Connection | Voltage |
|-------------|-------------------|------------------|---------------------|
| R134A | 3.3 Amp | 10amp 3 pin plug | 50/60 Hertz 240V |








ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required
Maximum ambient operating temperature 25°C @ RH 55

Maximum shelf load weight 15kg
spread evenly

All units rear venting

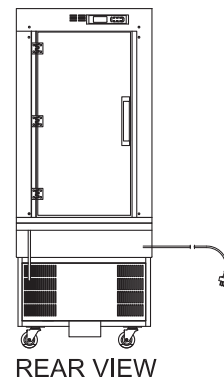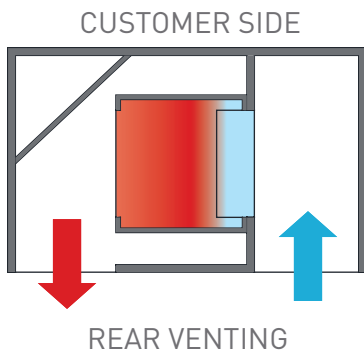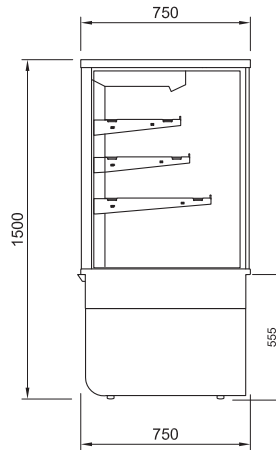



PRODUCT FEATURES

- Open front 1500mm high
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable glass shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Pull down night blind


CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

| Model | Cabinet | | | Shelving no. | SHELVES SIZE | | | | Total food units | Display m2 |
|--------|-----------|----------|-----------|--------------|--------------|---------|---------|-----------|------------------|------------|
| | Length mm | Depth mm | Height mm | | TOP | 2ND | 3RD | BASE(WXD) | | |
| TTGOR9 | 900 | 750 | 1500 | 3+BASE | 790X295 | 790X325 | 790X415 | 845X515 | 120 | 1.25 |

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| Refrigerant | Operating Current | Connection | Voltage |
|-------------|-------------------|------------------|---------------------|
| R134A | 3.7 Amp | 10amp 3 pin plug | 50/60 Hertz 240V |








ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required
Maximum ambient operating temperature 25°C @ RH 55

Maximum shelf load weight 15kg
spread evenly

All units rear venting

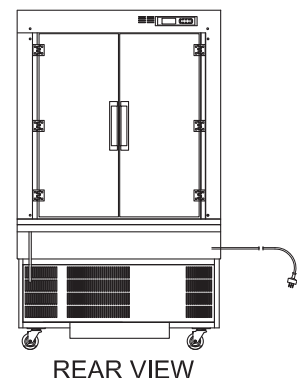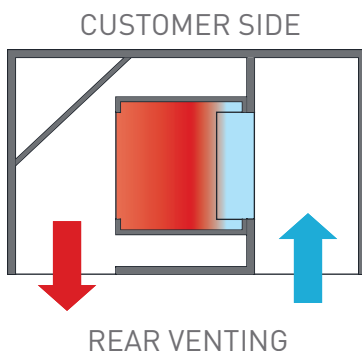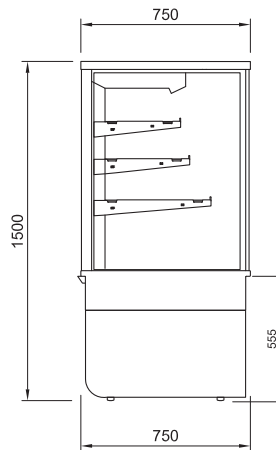



PRODUCT FEATURES

- Open front 1500mm high
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable glass shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Pull down night blind


CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

| Model | Cabinet | | | Shelving no. | SHELVES SIZE | | | | Total food units | Display m2 |
|---------|-----------|----------|-----------|--------------|--------------|----------|----------|-----------|------------------|------------|
| | Length mm | Depth mm | Height mm | | TOP | 2ND | 3RD | BASE(WXD) | | |
| TTGOR12 | 1200 | 750 | 1500 | 3+BASE | 1090X295 | 1090X325 | 1090X415 | 1145X515 | 155 | 1.71 |

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| Refrigerant | Operating Current | Connection | Voltage |
|-------------|-------------------|------------------|---------------------|
| R134A | 5.4 Amp | 10amp 3 pin plug | 50/60 Hertz 240V |

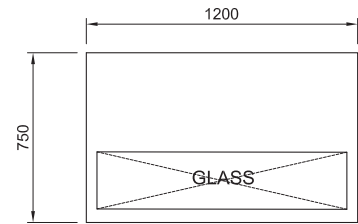

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required
Maximum ambient operating temperature 25°C @ RH 55

Maximum shelf load weight 15kg
spread evenly

All units rear venting

