

1000-BQ2/96

HOT HOLDING BANQUET CARTS



- HALO HEAT . . . a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life.
- Close temperature tolerance and even heat application provides even heat from top to bottom – side to side.
- Holds preplated food fresh, flavorful, and hot.
- No moisture pans, water or canned heat needed.
- Designed to adapt to any type of banquet holding:
 - Covered plates, stacked
 - Covered or uncovered plate carriers
 - Accepts trays for banquet service
 - Additional shelves for full-size and half-size pans (gastronorm pans)
- Dutch doors designed to keep heat in the top portion of the cabinet while removing plates from the bottom.
- Non-magnetic stainless steel interior resists corrosion.
- Full perimeter, wall-friendly bumper, transport handles, and heavy duty casters.
- Adjustable, electronic thermostat with digital display, to monitor inside air temperature.


Stainless steel exterior with two (2) dutch doors and a horizontal transport handle on each end of the cart. Cabinet is controlled with an ON/OFF power switch, adjustable, electronic thermostat which includes a heat indicator light, temperature set button, and temperature increase and decrease buttons. The thermostat has a temperature range of 200°F (93°C) to 60°F (16°C) and includes a digital display indicating the air temperature within the cabinet. Four (4) chrome plated wire shelves are included. A full-perimeter, wall-friendly bumper is included, along with four (4) 6" (154mm) heavy duty casters, 2 rigid and 2 swivel with brake.

Flexible choice of preplated meal service: This banquet cart will also hold covered meals without plate carriers. Additional shelves will equip cart to hold preplated meals without covers, trays, and bulk food items in pans.


MODEL 1000-BQ2/96: Mobile banquet cart with dutch doors with capacity of 96 meals (10" covered plates)


ADDITIONAL FEATURES & OPTIONS

- Plate Carriers
 - ➔ Uncovered "P" carriers
 - ➔ Covered "C" carriers
 - ➔ Uncovered "EP" carriers
 - ➔ Covered "EC" carriers



*Plate covers are not furnished. Plate carriers are optional.
Since plates and plate covers vary in size, cabinet may not hold maximum quantity of meals specified.*



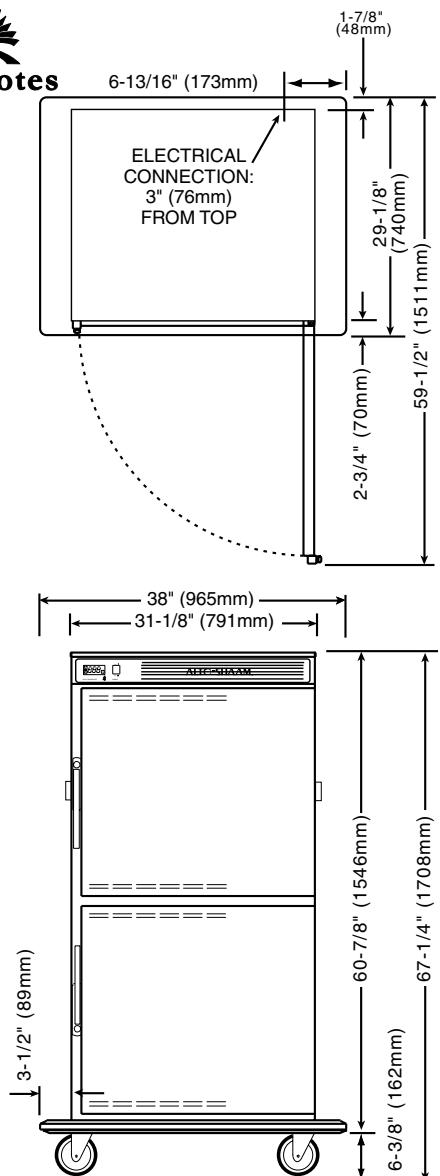
DIMENSIONS: H x W x D
EXTERIOR:

67-1/4" x 38" x 29-1/8" (1708mm x 965mm x 740mm)

INTERIOR PER DOOR OPENING:

25-1/4" x 28" x 24-1/2" (641mm x 711mm x 622mm)

ELECTRICAL

VOLTAGE	PHASE	CYCLE/Hz	AMPS	kW	CORD & PLUG INCLUDED
125	1	50/60	12.0	1.6	NEMA 5-15P 15A - 125V PLUG
208-240	1	50/60	6.9 max.	1.6	NEMA 6-15P 15A - 250V PLUG
230	1	50/60	6.5	1.5	CEE 7/7 220-230V PLUG

CAPACITY

240 lbs (109 kg) MAXIMUM

VOLUME MAXIMUM: 150 QUARTS (190 LITERS)

PLATES: (without plate carriers)

- 10" (254mm) with covers: 96
- 10-3/4" (273mm) with covers: 80

LARGER DIAMETER ITEMS WILL RESULT IN REDUCED PLATE CAPACITIES

PANS: Full-size and half-size pan combinations (per shelf)

- 12" x 20" (530mm x 325mm - GN 1/1): 2
- 12" x 10" (265mm x 325mm - GN 1/2): 4

ADDITIONAL WIRE SHELVES WITH SUPPORT CLIPS WILL ACCOMMODATE VARIOUS COMBINATIONS OF 2-1/2" (65mm), 4" (100mm) OR 6" (150mm) DEEP PANS

SHELF CAPACITY: (per shelf, without covers)

- 10" (254mm) plates: 6
- Shelves maximum: 16 SPACING ON CENTERS 3-5/32" (80mm)

INSTALLATION REQUIREMENTS

Cart must be installed level. It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

CLEARANCE REQUIREMENTS

Full perimeter bumper accommodates all clearance requirements.

WEIGHT

NET 302 lb (137 kg)

SHIP 360 lb (164 kg)

CRATE 76" x 43" x 35"

 DIMENSIONS: (1930mm x 1092mm x 889mm)
(H x W x D) DOMESTIC SHIPMENTS ONLY

OPTIONS & ACCESSORIES
Plate Carriers, chrome plated (EACH HOLD 4 PREPLATED MEALS)
 Uncovered "P" Carriers
DC-2868

Plate dia: 10" (254mm) max. • 7-3/4" (197mm) min.
Vertical rung spacing: 2-5/8" (67mm)

CAPACITY: 24 CARRIERS, 96 PREPLATED MEALS

 Covered "C" Carriers
DC-2869

Plate dia: 9-3/4" (248mm) max. • 7-3/4" (197mm) min.
Vertical clearance between top and bottom carrier: 11-5/8" (295mm)

CAPACITY: 24 CARRIERS, 96 PREPLATED MEALS

 Shelf & Shelf Supports (for each extra shelf)
1061/11533
Plate Carriers, chrome plated (EACH HOLD 4 PREPLATED MEALS)
 Uncovered "EP" Carriers
DC-23580

Plate dia: 12-1/2" (318mm) max. • 9-1/2" (241mm) min.
Vertical rung spacing: 2-5/8" (67mm)

CAPACITY: 16 CARRIERS, 64 PREPLATED MEALS

 Covered "EC" Carriers
DC-23676

Plate dia: 12-1/2" (318mm) max. • 9-1/2" (241mm) min.
Vertical clearance between top and bottom carrier: 11-5/8" (295mm)

CAPACITY: 16 CARRIERS, 64 PREPLATED MEALS

 Wire Shelf, chrome plated
SH-2835