

## BREMA C150A

### MODULAR ICE CUBE MACHINE

Brema's C range of modular ice cube heads produces attractive, crystalline ice cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.

The Brema C150A is a modular ice cube machine that produces 150kg of ice per 24 hours and is designed to fit on top of a range of Brema storage bins with differing capacities from 200kg to 350kg.

With its high production of ice cubes, the C150A modular ice cube machine is perfect for hotels, restaurants, bars and clubs.



### STANDARD FEATURES

- 150kg production per 24 hours
- Can be installed on top of storage bins with capacities between 200kg and 350kg
- Produces crystalline 13g cubes
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Electromechanical operation
- Stainless steel spray arm

13g Cubes



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

*From the world of Comcater!*

**National Head Office**  
156 Swann Drive  
Derrimut VIC 3030  
Tel: +61 3 8369 4600  
Fax: +61 3 8369 4695


**Melbourne**  
96-100 Tope Street,  
South Melbourne VIC 3205  
Tel: +61 3 8369 4600  
Fax: +61 2 8699 1299

**Sydney**  
20/4 Avenue of the Americas  
Newington, NSW 2127  
Tel: +61 2 9748 3000  
Fax: +61 2 9 648 4762

**Brisbane**  
1/62 Borthwick Avenue  
Murarrie QLD 4172  
Tel: +61 7 3399 3122  
Fax: +61 7 3399 5311

[www.comcater.com.au](http://www.comcater.com.au)

## BREMA C150A

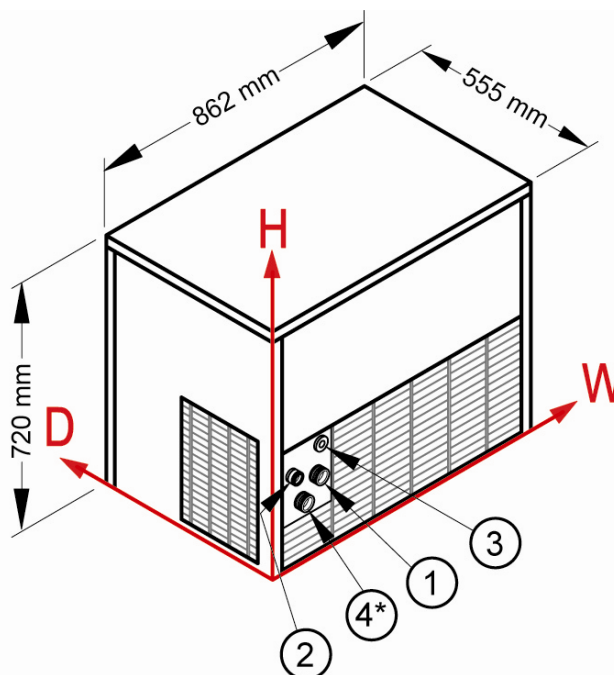

- (1) Water inlet  
(2) Water outlet  
(3) Electrical connection

\*(4) Water cooled model only - available upon request

### DIMENSIONS

862W x 555D x 720H mm

### CONNECTIONS

Water inlet, Water outlet & Electrical connection

### USABLE BINS

BIN200, BIN240PE, BIN350, DRB100

### TECHNICAL DATA

Production 24h	155 kg
Cooling System	Air
Cube	13 g
Refrigerant	R404A
Electrical Consumption	1400W
Power Requirements	240V 15amp
Weight	118 kg

### STANDARD ACCESSORIES

- Water Inlet Hose
- Drainage hose
- External Water Filter
- Pressure Limiting Valve

### CONNECTIONS

	W	H
Water inlet	126 mm	284 mm
Water outlet	69 mm	297 mm
Electrical connection	140 mm	355 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



[www.comcater.com.au](http://www.comcater.com.au)

PROUDLY DISTRIBUTED BY: