

## BREMA CB955A

### SELF-CONTAINED ICE CUBE MACHINE

Brema's flagship CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.

The Brema CB955A is a free-standing ice cube machine that produces 90kg of ice per 24 hours and has storage capacity of 55kg.

The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.



### STANDARD FEATURES

- 90kg production per 24 hours
- 55kg storage capacity
- Produces crystalline 13g cubes
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Fully insulated internal storage bin
- Disappearing door
- Electromechanical operation
- Stainless steel spray arm

13g Cubes



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

*From the world of Comcater!*

**National Head Office**  
156 Swann Drive  
Derrimut VIC 3030  
Tel: +61 3 8369 4600  
Fax: +61 3 8369 4695


**Melbourne**  
96-100 Tope Street,  
South Melbourne VIC 3205  
Tel: +61 3 8369 4600  
Fax: +61 2 8699 1299

**Sydney**  
20/4 Avenue of the Americas  
Newington, NSW 2127  
Tel: +61 2 9748 3000  
Fax: +61 2 9 648 4762

**Brisbane**  
1/62 Borthwick Avenue  
Murarrie QLD 4172  
Tel: +61 7 3399 3122  
Fax: +61 7 3399 5311

[www.comcater.com.au](http://www.comcater.com.au)

## BREMA CB955A

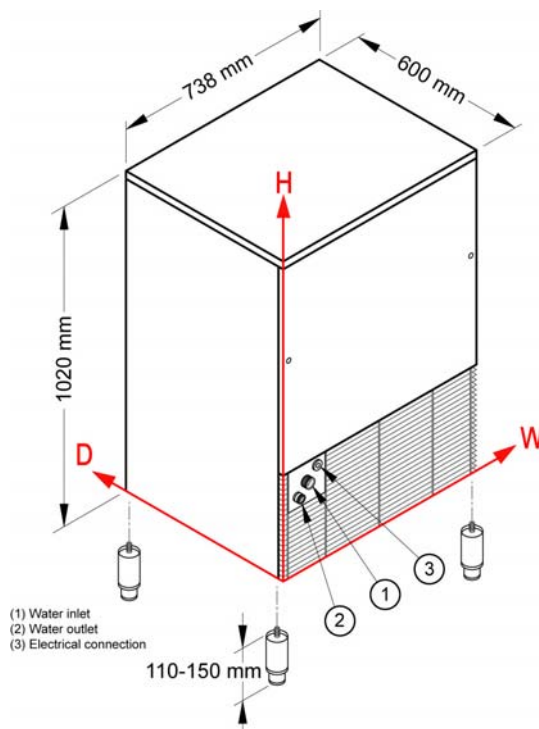

### DIMENSIONS

738W x 600D x 1020\*H mm  
(\*add 110-150mm for adjustable legs)

### CONNECTIONS

Water inlet, Water outlet & Electrical connection

### TECHNICAL DATA

Production 24h	90 kg
Storage Capacity	55 kg
Cooling System	Air
Cube	13 g
Refrigerant	R404A
Electrical Consumption	850W
Power Requirements	240V 10amp
Weight	89 kg

### STANDARD ACCESSORIES

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- Adjustable stainless steel legs (4)

### CONNECTIONS

	W	H
Water inlet	116 mm	285 mm
Water outlet	54 mm	240 mm
Electrical connection	161 mm	321 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



[www.comcater.com.au](http://www.comcater.com.au)

PROUDLY DISTRIBUTED BY: