

BREMA GB903A

SELF-CONTAINED ICE FLAKER

Brema's GB range of self-contained ice flakers produces granular ice flakes and stores them in an internal storage bin.

The Brema GB903A is a free-standing ice flaking machine that produces 90kg of granular ice per 24 hours and has storage capacity of 30kg.

Granular ice is ideal for exhibiting and presenting foods as well as for use in medical industries. The ice has a fast and efficient refrigerating effect and is easy to handle and dose.



STANDARD FEATURES

- 90kg production per 24 hours
- 30kg storage capacity
- Produces compact, granular flakes
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Fully insulated internal storage bin
- Disappearing door
- Electromechanical operation
- Powerful gear motor and auger system



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


From the world of Concater!

National Head Office 156 Swann Drive Derrimut VIC 3030 Tel: +61 3 8369 4600 Fax: +61 3 8369 4695 Melbourne 96-100 Tope Street, South Melbourne VIC 3205 Tel: +61 3 8369 4600 Fax: +61 2 8699 1299 Sydney 20/4 Avenue of the Americas Newington, NSW 2127 Tel: +61 2 9748 3000 Fax: +61 2 9 648 4762 **Brisbane** 1/62 Borthwick Avenue Murarrie QLD 4172 Tel: +61 7 3399 3122 Fax: +61 7 3399 5311



BREMA GB903A



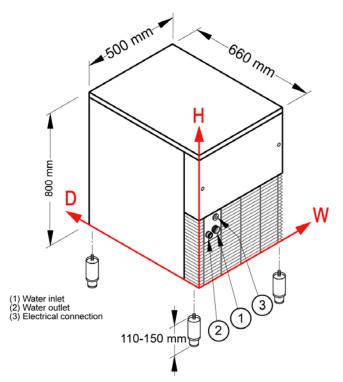

DIMENSIONS

500W x 660D x 800*H mm (*add 110-150mm for adjustable legs)

CONNECTIONS

Water inlet, Water outlet & Electical connection

TECHNICAL DATA

| Production 24h | 90 kg |
|------------------------|------------|
| Storage Capacity | 30 kg |
| Cooling System | Air |
| Ice Type | Granular |
| Refrigerant | R404A |
| Electrical Consumption | 550W |
| Power Requirements | 240V 10amp |
| Weight | 67 kg |

STANDARD ACCESSORIES

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- Adjustable stainless steel legs (4)

| CONNECTIONS | W | Н |
|-----------------------|-----------------|------------------|
| Water inlet | 99 mm | 158 mm |
| Water outlet | 48 mm | 151 mm |
| Electrical connection | 87 mm | 230 mm |
| Clearances | Rear: 100 mm | Sides: 100 mm |

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



PROUDLY DISTRIBUTED BY: