

## BREMA M1500A

### MODULAR ICE FLAKE MACHINE

Brema's MUSTER range of modular ice flaker heads produces sub-zero flat ice flakes which automatically drop into a separate Brema storage bin.

The Brema M1500A is a modular ice flaking machine that produces 1500kg of flat ice flakes per 24 hours and is designed to fit on top of a range of Brema storage bins with differing capacities from 500kg to 1200kg.

At between  $-5^{\circ}\text{C}$  and  $-10^{\circ}\text{C}$ , MUSTER flaked ice is ideal for processing, transporting and preserving foods. The ice is long-lasting, has a fast and efficient refrigerating effect and is easy to handle and dose.



### STANDARD FEATURES

- 1500kg production per 24 hours
- Can be installed on top of storage bins with capacities between 500kg and 1200kg
- Produces flat ice flakes between  $-5^{\circ}\text{C}$  and  $-10^{\circ}\text{C}$
- Production rated at  $21^{\circ}\text{C}$  air and  $15^{\circ}\text{C}$  water
- Hospital grade stainless steel outer
- Electromechanical operation
- Powerful cylindrical evaporator and ice scraper system

#### Cold Flakes



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

*From the world of Comcater!*

**National Head Office**  
156 Swann Drive  
Derrimut VIC 3030  
Tel: +61 3 8369 4600  
Fax: +61 3 8369 4695


**Melbourne**  
96-100 Tope Street,  
South Melbourne VIC 3205  
Tel: +61 3 8369 4600  
Fax: +61 2 8699 1299

**Sydney**  
20/4 Avenue of the Americas  
Newington, NSW 2127  
Tel: +61 2 9748 3000  
Fax: +61 2 9 648 4762

**Brisbane**  
1/62 Borthwick Avenue  
Murarrie QLD 4172  
Tel: +61 7 3399 3122  
Fax: +61 7 3399 5311

[www.comcater.com.au](http://www.comcater.com.au)

## BREMA M1500A

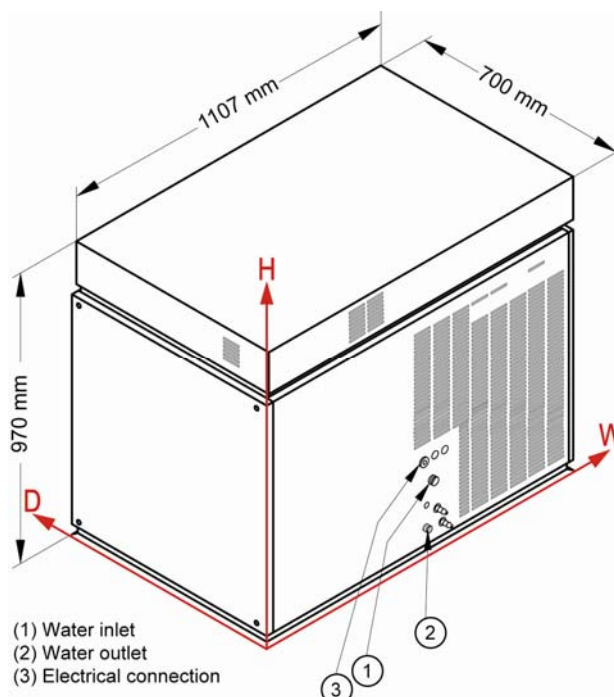

### DIMENSIONS

1107W x 700D x 970H mm

### CONNECTIONS

Water inlet, Water outlet & Electrical connection

### USABLE BIN

BIN550 V DS, DRB100, DRB500, DRB1200

### TECHNICAL DATA

Production 24h	1500 kg
Cooling System	Air
Ice Type	Sub-zero flakes
Refrigerant	R404A
Electrical Consumption	6000W
Power Requirements	415V 32amp 3P
Weight	306 kg

### STANDARD ACCESSORIES

- Water Inlet Hose
- Drainage hose
- External Water Filter
- Pressure Limiting Valve

### CONNECTIONS

	W	H
Water inlet	563 mm	192 mm
Water outlet	528 mm	65 mm
Electrical connection	532 mm	262 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



[www.comcater.com.au](http://www.comcater.com.au)

PROUDLY DISTRIBUTED BY: