

B-2 SERIES

Standard Range

SKOPE®

Display / Bottom Mount

An innovative, self-learning, electronic controller gathers and automatically updates data of store closing times and quiet periods, ensuring optimal energy efficiency at all times.

Options

Illuminated sign panel

Ability to operate as either perishable mode or non-perishable mode

Energy efficient long-life LED lights as standard

High speed energy efficient EC condenser fan motor

Fully removable electronically controlled cassette for easy servicing

Self-closing doors with double glazed, double Low/E, argon filled, toughened safety glass

Automatic energy saving mode

High ambient temperature performance

EMS Controller with fuzzy logic to ensure maximum energy efficiency

Lockable swivel castors

B1200-2



Warranty
2 year protection




**High Energy
Efficiency**

Specifications

B-2 Series

Display / Bottom Mount

SKOPE®

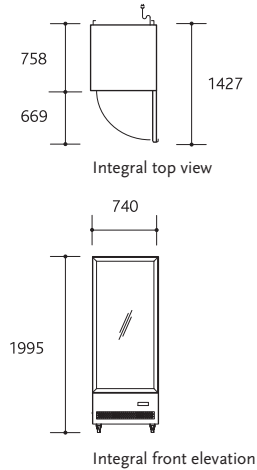


B600-2 - GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	White (AUS)	S/S (AUS)	
B600-2	190	Integral	Chiller	3,140	N/A	
		Integral				
		External (mm)	Internal (mm)			
Height		2005	1454			Gross Volume 584 litres
Width		740	640			Total Shelf Area 1.62m ²
Depth		758	602			Floor Area 0.6m ² (inc. 50mm stand-off)
Door Height		1536				
Glass Area		0.92m ²				

- 4.62 MEPS (kWh/24h/m²)
- Maximum height 2195mm with optional sign panel fitted
- +2°C to +4°C in 40°C ambient



B600-2
1 DOOR

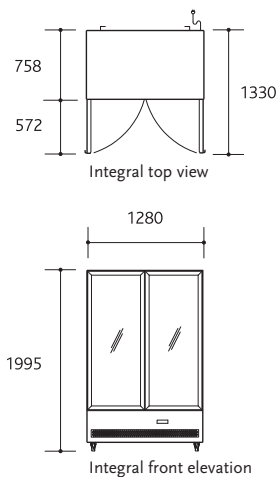

B1200-2 - GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	White (AUS)	S/S (AUS)	
B1200-2	254	Integral	Chiller	3,920	N/A	
		Integral				
		External (mm)	Internal (mm)			
Height		2005	1454			Gross Volume 1079 litres
Width		1280	1180			Total Shelf Area 3m ²
Depth		758	602			Floor Area 1.03m ² (inc. 50mm stand-off)
Door Height		1536				
Glass Area		1.57m ²				

- 6.29 MEPS (kWh/24h/m²)
- Maximum height 2195mm with optional sign panel fitted
- +2°C to +4°C in 40°C ambient



B1200-2
2 DOOR