

● CONVECTION OVENS-GAS & ELECTRIC ●

PROUDLY AUSTRALIAN MADE

- HIGH CAPACITY FAN FORCED PRODUCTION OVEN WITH FULL LOAD.
- ACCEPTS STANDARDS GASTRONORM OR FULL SIZE BAKING TRAYS.
- MICRO PROCESSOR TOUCH PAD CONTROLS FOR ALL FUNCTIONS.
- AUTOMATIC TIMER.
- ROLL IN/OUT CASSETTE STANDARD COMPLETE WITH 5 RACKS.
- ALL ELECTRIC MODELS CAN BE DOUBLE STACKED.



X500 / X700 WITH OPTIONAL EXTRA GLASS DOORS

X500 GAS STANDARD S/STEEL DOORS
X700 ELECTRIC STANDARD S/STEEL DOORS



Goldstein

Established 1911

The Cooking Equipment Professionals

www.goldsteineswood.com.au

CONVECTION OVENS-FREE STANDING GAS & ELECTRIC

CONSTRUCTION

OVEN: Interior	1.6mm stainless steel
Exterior	0.9mm stainless steel
Legs	1.6mm zinc anneal
Base	2mm zinc anneal
Door	0.9mm stainless steel
Insulation	50mm rigid fibre glass ensures minimum heat loss.

- Oven vent to regulate humidity.
- A micro-chip processor is supplied as **standard**.
- Even fan force cooking ovens-no flavour **transfer**.
- Gas models-high capacity cast iron long **life**, burner incorporates rear heat exchanger tubes giving more even roasting and baking.
- Electric models-long life high capacity incalloy elements around fan for perfect heat transfer.

Gastronorm or standard trays

The X700A/X500A oven is the only one available which can accommodate both double gastronorm and standard baking trays. The ovens offer maximum space plus flexibility.



Accessories Provided with oven


- Roll in/out cassette rack complete with 5 full size non tilt shelves standard.
- Micro-processor giving accurate temperature and time controls up to 290 °C and 16 hours.

Accessories optional on request

- Steam injection for baking or for meats to reduce shrinkage, micro processor touch pad control.
- Stainless steel trolley for carrying loaded cassette.
- Gastronorm and standard bakers tray accommodated in the cassette.
- Stainless steel legs to support oven.

Roll-in-Roll-out cassette rack

The ten-slide, roll-in rack interior is engineered to enable ease of loading and oven cleaning. It makes the oven perfect for cook-chill or high volume application.

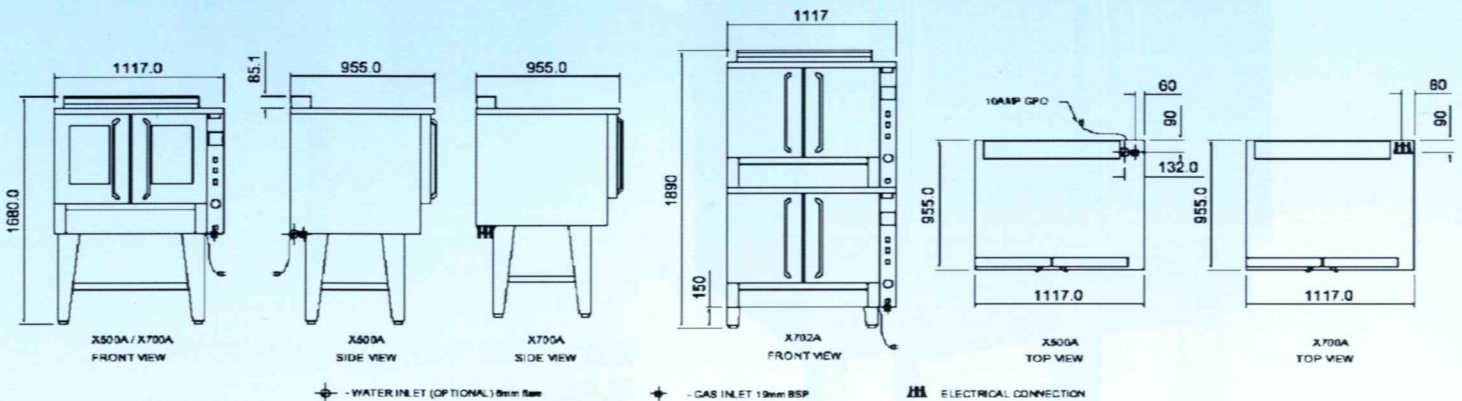

MODEL No	OVERALL DIMENSIONS			OVEN INTERIOR			POWER CONNECTION			APPROX. SHIP WT. Kg.
	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	GAS MJ	ELECTRIC Kw		
	mm	mm	mm	mm	mm	mm		240V / 1PH	415V / 3 / 5 PIN	
X500A	1117	955	1680	760	580	520	62	0.5		250
X700A	1117	955	1680	760	580	520			13	250
X702A	1117	955	1890	760	580	520			26	500

B38

Goldstein  ESWOOD

ABN 74 000 100 845 - ABN 87 002 481 521

Group Sales: 211-213 Woodpark Rd, Smithfield NSW 2164
 Telephone (02) 9604 7333 Facsimile (02) 9604 5420
 Vic (03) 9553 1355. Qld (07) 3891 1466.
 SA (08) 8238 3423. WA (08) 9456 0559.
 Distributors: ACT (02) 6280 4088. Tas (03) 6234 8300.



Proudly Distributed by

Goldstein Eswood Continually strive to improve all of our products, therefore specifications may be amended from those printed in this brochure without notice. Publication ESW776.0503