



BREMA M2000A

MODULAR ICE FLAKE MACHINE

Brema's MUSTER range of modular ice flaker heads produces sub-zero flat ice flakes.

The Brema M2000A is a modular ice flaking machine that produces 2200kg of flat ice flakes per 24 hours and is designed to be installed on top of freezer rooms

At between -5°C and -10°C , MUSTER flaked ice is ideal for processing, transporting and preserving foods. The ice is long-lasting, has a fast and efficient refrigerating effect and is easy to handle and dose.



STANDARD FEATURES

- 2200kg production per 24 hours
- Can be installed on top of freezer rooms
- Produces flat ice flakes between -5°C and -10°C
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Electromechanical operation
- Powerful cylindrical evaporator and ice scraper system

Cold Flakes



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

From the world of Comcater!

National Head Office
156 Swann Drive
Derrimut VIC 3030
Tel: +61 3 8369 4600
Fax: +61 3 8369 4695

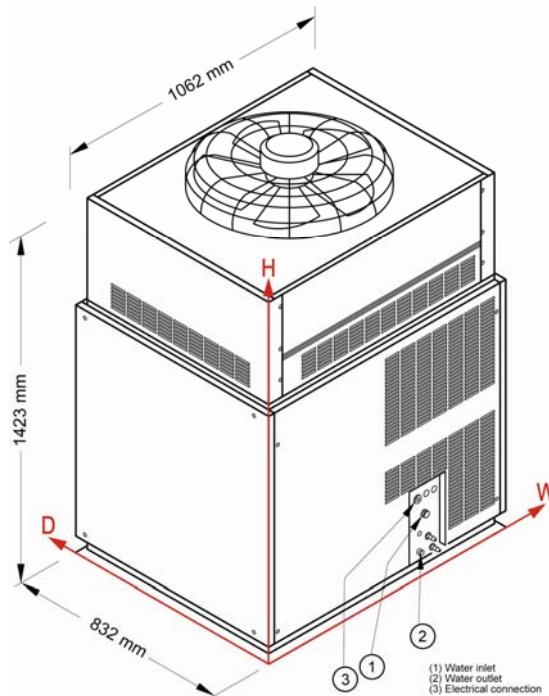
Melbourne
96-100 Tope Street,
South Melbourne VIC 3205
Tel: +61 3 8369 4600
Fax: +61 2 8699 1299

Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Tel: +61 2 9748 3000
Fax: +61 2 9 648 4762

Brisbane
1/62 Borthwick Avenue
Murarrie QLD 4172
Tel: +61 7 3399 3122
Fax: +61 7 3399 5311

www.comcater.com.au

COMCATER
foodservice equipment

**DIMENSIONS**

1062W x 832D x 1423H mm

CONNECTIONS

Water inlet, Water outlet & Electrical connection

TECHNICAL DATA

Production 24h 2200 kg

Cooling System Air

Ice Type Sub-zero flakes

Refrigerant R404A

Electrical Consumption 7000W

Power Requirements 415V 32amp 3P

Weight 460 kg

STANDARD ACCESSORIES

- Water Inlet Hose
- Drainage hose
- External Water Filter
- Pressure Limiting Valve

CONNECTIONS

	W	H
Water inlet	684 mm	192 mm
Water outlet	659 mm	65 mm
Electrical connection	642 mm	271 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.