
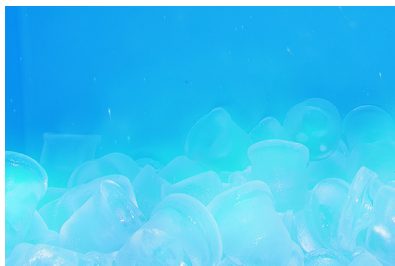


Features

- 150kg ice cube production in 24 hours.
- The GALA series produces perfect elegant gourmet ice cubes every time.
- GALA ice cubes will not alter the flavour or water down beverages excessively. Undoubtedly the best ice for scotch and whiskey. The truncated cone shape makes them suitable for all types of glasses.
- Easy access external operational switches.
- High efficiency, low energy consumption.
- Optional stacking kit available for duplicating production in the same footprint.
- Tropical T Class compressors suitable for use in environments up to 43°C ambient.
- Flexible nozzle spray system to reduce build up of limescale.
- Strong solid AISI 304 stainless steel box-type frame. Easy servicing without disassembling the whole machine.
- 2 year warranty.

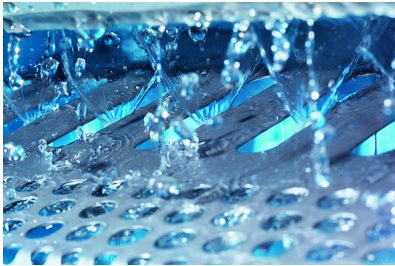

Ice production per 24h cycle

Air 21°C	Water 15°C
150 kg	

Storage capacity

Optional 230 kg storage bin accessory available (S220 Storage Bin)


Ice type



GALA 23-30cc

35mm (Ø) × 34mm (H)

Supplied accessories

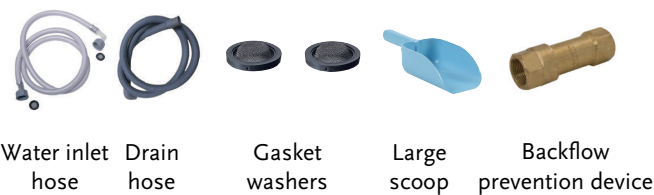

Water inlet hose


Drain hose

Gasket washers

Large scoop

Backflow prevention device

Optional accessories



S220 storage bin

Stacking kit


Water filter

A Watermark approved* water filter, suitable for the water type at the place of installation must be used. SKOPE can provide a water filter that protects the Ice Maker, and ensures proper function and high quality ice production. Service or repair due to absence of a suitable water filter will not be covered by SKOPE warranty. Contact SKOPE for more information.

*Watermark approval is only applicable to Australian installations. Elsewhere, a suitable water filter must be used.




Modular Ice Cube Maker

ITV-GALA MDP 150 A



Cabinet dimensions

Height	805mm
Width	775mm
Depth	625mm
Floor area	0.48m ²
Weight	70kg

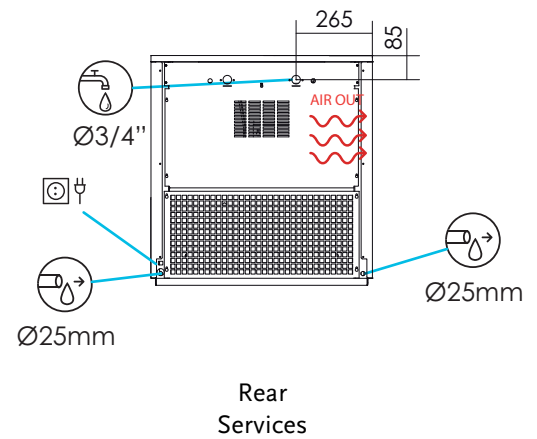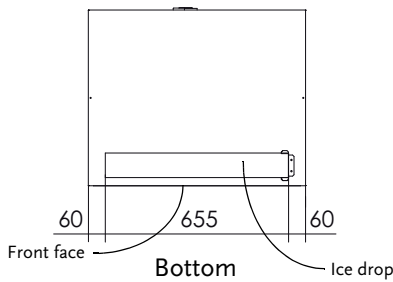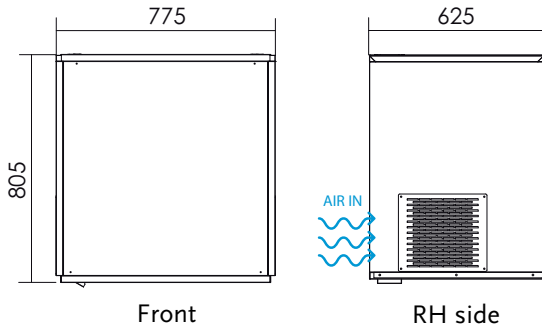

General Specifications

Ambient temperature range	5°C to 43°C
Water temperature range	5°C to 35°C
Water supply pressure	10 psi (0.7 bar.) to 86 psi (6 bar.)
Water consumption	22 L/h
Power supply	220-240 Volts a.c. 50 Hz, single phase supply. Requires 20Amp supply. Plug not included.
Current draw	6A
Electrical power	1200W at 43°C
Fuse	16Amp
Wire diameter	1.5mm
Heat rejected	2647W
Energy efficiency	20kWh per 100kg
Refrigerant	R404A
Compressor capacity	1195W
Condenser cooling system	Air cooled

Ice production per 24 hour cycle (kg)

		Water temperature			
		10°C	15°C	21°C	30°C
Ambient temperature	10°C	163	161	142	118
	21°C	151	150	130	106
	32°C	138	136	116	92
	43°C	104	102	83	59

Ice cube storage capacity

Bins to suit

Ice cubes per cycle

84

Ice cube dimensions

35mm (Ø) × 34 mm (H)